



Secure Firewall Management Center REST API Quick Start Guide, Version 7.3.0

First Published: 2022-11-29

Last Modified: 2022-11-29

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on standards documentation, or language that is used by a referenced third-party product.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1	About the Management Center REST API	1
	About the Management Center REST API	1
	Whats New in 7.1	1
	Whats New in 7.2	4
	What's New in 7.3	8
	Enabling the REST API	11
	Best Practices	11
	Additional Resources	12

CHAPTER 2	About the API Explorer	13
	About the API Explorer	13
	Authentication to the API Explorer	13
	Logging into API Explorer	14
	Setting the Domain	14
	Accessing the Legacy API Explorer	15
	Obtaining Sample Code with CodeGen	15
	Downloading the Open API Spec	15
	Generating Sample Code with the CodeGen Utility	16
	Viewing API Parameters	17

CHAPTER 3	Connecting with a Client	19
	Authentication from a REST API Client	19
	Requesting an Authentication Token	20
	Refreshing an Authentication Token	21

CHAPTER 4	Objects in the REST API	23
------------------	--------------------------------	-----------

Request Structure	23
Bulk Rule Posting	25
Response Structure	26
Rate Limiting	28
Payload Limiting	28
Object Overrides	29
Field Renaming	30
Troubleshoot	30
DELETE packettracerfiles	30
POST task	30
Network Map	31
GET netmaphosts	31
DELETE netmaphosts	31
POST netmaphosts	31
GET vulns	31
DELETE vulns	32
POST vulns	32
Audit Services	32
GET auditrecords	32
Users	32
GET authroles	32
GET SSO Config	33
PUT SSO Config	33
GET duoconfigs	33
PUT duoconfigs	33
Deployment Services	34
GET deployabledevices	34
GET deployments	34
GET pendingchanges	34
POST deploymentrequests	34
GET jobhistories	34
PUT jobhistories	35
GET downloadreports	35
POST emailreports	35

POST rollbackrequests	35
Device Group Services	36
DELETE devicegrouprecords	36
PUT devicegrouprecords	36
POST devicegrouprecords	36
GET devicegrouprecords	36
Device Clusters	36
GET fddevicecluster	36
PUT fddevicecluster	37
POST fddevicecluster	37
DELETE fddevicecluster	38
POST fdclusterreadinesscheck	38
POST fdclusterdevicecommands	38
GET clusterhealthmonitorsettings	39
PUT clusterhealthmonitorsettings	39
Device HA Pair Services	39
DELETE fddevicehapair	39
PUT fddevicehapair	39
POST fddevicehapairs	40
GET fddevicehapairs	40
DELETE failoverinterfacemacaddressconfigs	40
GET failoverinterfacemacaddressconfigs	41
POST failoverinterfacemacaddressconfigs	41
PUT failoverinterfacemacaddressconfigs	41
GET monitoredinterfaces	41
PUT monitoredinterfaces	42
Device Services	42
POST copyconfigrequests	42
POST exports	42
POST imports	42
GET bgp routing	43
PUT bgp	43
POST bgp	43
DELETE bgp	43

DELETE devicerecords	43
PUT devicerecords	44
POST devicerecords	44
GET devicerecords	44
PUT fpphysicalinterfaces	44
GET fpphysicalinterfaces	44
DELETE fplogicalinterfaces	45
PUT fplogicalinterfaces	45
POST fplogicalinterfaces	45
GET fplogicalinterfaces	45
DELETE inlinesets	46
PUT inlinesets	46
POST inlinesets	46
GET inlinesets	46
GET Metrics	46
GET staticroutes	47
GET virtualrouters	47
PUT virtual routers	47
POST virtual routers	47
DELETE virtual routers	48
GET virtual BGP	48
PUT virtual bgp	48
POST virtual bgp	48
DELETE virtual bgp	48
GET virtual ipv4staticroutes	49
PUT virtual ipv4 static routes	49
POST virtual ipv4 static routes	49
DELETE virtual ipv4 static routes	50
GET virtual ipv6staticroutes	50
PUT virtual ipv6 static routes	50
POST virtual ipv6 static routes	51
DELETE virtual ipv6 static routes	51
GET virtual ospf interface	52
GET virtual ospfv2 routes	52

GET virtual static routes	52
DELETE ipv4staticroutes	52
PUT ipv4staticroutes	53
POST ipv4staticroutes	53
GET ipv4staticroutes	53
DELETE ipv6staticroutes	53
PUT ipv6staticroutes	53
POST ipv6staticroutes	54
GET ipv6staticroutes	54
GET ospf interface	54
GET ospfv2routes	54
GET ospfv3interfaces	55
GET ospfv3routes	55
GET ecmpzones	55
PUT ecmpzones	55
POST ecmpzones	56
DELETE ecmpzones	56
GET virtual ecmpzones	56
PUT virtual ecmpzones	56
POST virtual ecmpzones	56
DELETE virtual ecmpzones	57
POST packettracer	57
POST packettracerpcap	57
GET policybasedroutes	57
PUT policybasedroutes	58
POST policybasedroutes	58
DELETE policybasedroutes	58
GET virtualpolicybasedroutes	58
PUT virtualpolicybasedroutes	58
POST virtualpolicybasedroutes	59
DELETE virtualpolicybasedroutes	59
GET vteppolicies	59
PUT vteppolicies	59
POST vteppolicies	59

DELETE vteppolicies	60
DELETE virtualswitches	60
PUT virtualswitches	60
POST virtualswitches	60
GET virtualswitches	60
GET Virtual Tunnel Interfaces	61
PUT Virtual Tunnel Interfaces	61
POST Virtual Tunnel Interfaces	61
DELETE Virtual Tunnel Interfaces	62
DELETE vlaninterfaces	62
PUT vlaninterfaces	62
POST vlaninterfaces	62
GET vlaninterfaces	62
GET vniinterfaces	63
PUT vniinterfaces	63
POST vniinterfaces	63
DELETE vniinterfaces	63
PUT fpphysicalinterfaces	64
GET fpphysicalinterfaces	64
PUT physicalinterfaces	64
GET physicalinterfaces	64
GET bridgegroupinterfaces	65
POST bridgegroupinterfaces	65
PUT bridgegroupinterfaces	65
DELETE bridgegroupinterfaces	65
GET redundantinterfaces	66
POST redundantinterfaces	66
PUT redundantinterfaces	66
DELETE redundantinterfaces	66
GET bgp routing	66
GET bgp general settings	67
PUT bgpgeneralsettings	67
POST bgpgeneralsettings	67
DELETE bgpgeneralsettings	67

GET etherchannelinterfaces	68
POST etherchannelinterfaces	68
PUT etherchannelinterfaces	68
DELETE etherchannelinterfaces	68
GET subinterfaces	68
POST subinterfaces	69
PUT subinterfaces	69
DELETE subinterfaces	69
GET fpinterfacestatistics	69
POST interfaceevents	70
GET interfaceevents	70
GET commands	70
GET fdallinterfaces	71
POST changemanagers	71
GET devicesettings	71
PUT devicesettings	71
DELETE eigrproutes	72
GET eigrproutes	72
POST eigrproutes	72
PUT eigrproutes	72
DELETE bfdpolicies	72
GET bfdpolicies	73
POST bfdpolicies	73
PUT bfdpolicies	73
DELETE loopbackinterfaces	73
GET loopbackinterfaces	74
POST loopbackinterfaces	74
PUT loopbackinterfaces	74
Health Services	74
GET tunnelstatuses	74
GET tunnelsummaries	75
GET Health Alerts	75
GET Health Metrics	75
GET ravpngateways	75

POST terminateravpnsessions 76

GET csdac 76

POST csdac 76

GET pathmonitoredinterfaces 76

Backup 76

POST devicebackup 76

GET downloadbackup 77

DELETE files 77

GET files 77

Chassis 77

GET fmcmanagedchassis 77

GET networkmodules 78

PUT networkmodules 78

PUT syncnetworkmodule 78

GET chassisinterfaces 78

GET networkmodules 78

POST breakoutinterfaces 79

GET evaluateoperation 79

POST joininterfaces 79

GET physicalinterfaces 79

PUT physicalinterfaces 80

Intelligence Services 80

POST collections 80

POST discoveryinfo 80

GET element 80

DELETE incident 80

PUT incident 81

GET incident 81

PUT indicator 81

GET indicator 81

PUT observable 82

GET observable 82

PUT settings 82

GET settings 83

DELETE source	83
PUT source	83
POST source	83
GET source	83
License	84
GET smartlicenses	84
POST smartlicenses	84
GET devicelicense	84
PUT devicelicense	84
Search	85
GET globalsearch	85
GET objectsearch	85
GET policysearch	85
GET device	85
Integration Services	86
PUT cloudeventsconfigs	86
GET cloudeventsconfigs	86
PUT cloudregions	86
GET cloudregions	86
DELETE externallookups	87
PUT externallookups	87
POST externallookups	87
GET externallookups	87
DELETE packetanalyzerdevices	87
PUT packetanalyzerdevices	88
POST packetanalyzerdevices	88
GET packetanalyzerdevices	88
GET External Storage	88
PUT External Storage	88
GET FMC HA Statuses	89
GET dynamicattributesfeeds	89
PUT dynamicattributesfeeds	89
GET SecureX Configs	89
PUT SecureX Configs	89

GET ebssnapshot 90

POST ebssnapshot 90

POST testumbrellaconnections 90

GET umbrellaconnections 90

PUT umbrellaconnections 90

GET tunneldeployments 91

POST tunneldeployments 91

GET tunneltranscripts 91

GET datacenters 91

GET transcripts 91

Object Services 92

GET AnyConnect Custom Attributes 92

PUT AnyConnect Custom Attributes 92

POST AnyConnect Custom Attributes 92

DELETE AnyConnect Custom Attributes 92

GET AnyConnect Packages 93

DELETE anyconnectpackages 93

POST anyconnectpackages 93

PUT anyconnectpackages 93

GET anyconnectexternalbrowserpackages 93

DELETE anyconnectexternalbrowserpackages 94

POST anyconnectexternalbrowserpackages 94

PUT anyconnectexternalbrowserpackages 94

GET AnyConnect Profiles 94

DELETE anyconnectprofiles 95

POST anyconnectprofiles 95

PUT anyconnectprofiles 95

GET anyprotocolportobjects 95

GET applicationcategories 95

GET applicationfilters 96

PUT applicationfilters 96

POST applicationfilters 96

DELETE applicationfilters 96

GET applicationproductivities 96

GET applicationrisks	97
GET applications	97
GET applicationtags	97
GET applicationtypes	97
GET aspathlists	97
PUT aspathlists	98
POST aspathlists	98
DELETE aspathlists	98
DELETE bfdtemplates	98
GET bfdtemplates	98
POST bfdtemplates	99
PUT bfdtemplates	99
POST bulkdynamicobjects	99
GET certenrollments	99
DELETE certenrollments	99
POST certenrollments	100
PUT certenrollments	100
GET communitylists	100
GET Certificate Maps	100
DELETE certificatemaps	100
POST certificatemaps	101
PUT certificatemaps	101
GET continents	101
GET countries	101
DELETE dhcpipv6pools	101
GET dhcpipv6pools	102
POST dhcpipv6pools	102
PUT dhcpipv6pools	102
DELETE dnsservergroups	102
PUT dnsservergroups	102
POST dnsservergroups	102
GET dnsservergroups	103
POST downloadinternalca	103
POST dynamicobjectmappings	103

DELETE dynamicobjectmappings	103
GET dynamicobjects	104
POST dynamicobjects	104
DELETE dynamicobjects	104
PUT dynamicobjects	105
GET mappings	105
PUT mappings	105
DELETE mappings	105
GET endpointdevicetypes	106
GET expanded community lists	106
PUT expandedcommunitylists	106
POST expandedcommunitylists	106
DELETE expandedcommunitylists	106
GET extended access lists	107
PUT extendedaccesslists	107
POST extendedaccesslists	107
DELETE extendedaccesslists	107
GET extendedcommunitylists	107
PUT extendedcommunitylists	108
POST extendedcommunitylists	108
DELETE extendedcommunitylists	108
DELETE fqdns	108
PUT fqdns	109
POST fqdns	109
GET fqdns	109
GET geolocation	109
PUT geolocations	110
POST geolocations	110
DELETE geolocations	110
GET global time zones	110
GET groupolicies	110
DELETE groupolicies	111
POST groupolicies	111
PUT groupolicies	111

DELETE hosts	111
PUT hosts	111
POST hosts	112
GET hosts	112
GET hostscanpackages	112
DELETE hostscanpackages	112
POST hostscanpackages	113
PUT hostscanpackages	113
DELETE icmpv4objects	113
PUT icmpv4objects	113
POST icmpv4objects	113
GET icmpv4objects	114
DELETE icmpv6objects	114
PUT icmpv6objects	114
POST icmpv6objects	114
GET icmpv6objects	115
DELETE ikev1ipsecproposals	115
PUT ikev1ipsecproposals	115
POST ikev1ipsecproposals	115
GET ikev1ipsecproposals	115
DELETE ikev1policies	116
PUT ikev1policies	116
POST ikev1policies	116
GET ikev1policies	116
DELETE ikev2ipsecproposals	117
PUT ikev2ipsecproposals	117
POST ikev2ipsecproposals	117
GET ikev2ipsecproposals	117
DELETE ikev2policies	117
PUT ikev2policies	118
POST ikev2policies	118
GET ikev2policies	118
DELETE interfacegroups	118
PUT interfacegroups	118

POST interfacegroups	119
GET interfacegroups	119
GET interfaceobjects	119
DELETE internalcas	120
GET internalcas	120
POST internalcas	120
PUT internalcas	120
DELETE internalcertificates	120
GET internalcertificates	120
POST internalcertificates	121
PUT internalcertificates	121
GET intrusionrulegroups	121
PUT intrusionrulegroups	121
POST Intrusion Rule Groups	122
DELETE Intrusion Rule Groups	122
GET intrusionrules	122
PUT intrusionrules	122
POST intrusionrules	122
DELETE intrusionrules	123
GET ipv4addresspools	123
DELETE ipv4addresspools	123
POST ipv4addresspools	123
PUT ipv4addresspools	123
GET ipv6addresspools	124
DELETE ipv6addresspools	124
POST ipv6addresspools	124
PUT ipv6addresspools	124
GET ipv4prefixlists	124
PUT ipv4prefixlists	125
POST ipv4prefixlists	125
DELETE ipv4prefixlists	125
GET ipv6prefixlists	125
PUT ipv6prefixlists	125
POST ipv6prefixlists	126

DELETE ipv6prefixlists	126
GET isesecuritygrouptags	126
GET keychain	126
DELETE keychain	127
PUT keychain	127
POST keychain	127
GET localrealmusers	128
PUT localrealmusers	128
POST localrealmusers	128
POST localrealmusers	128
GET networkaddresses	128
DELETE networkgroups	129
PUT networkgroups	129
POST networkgroups	129
GET networkgroups	129
DELETE networks	130
PUT networks	130
POST networks	130
GET networks	130
GET packettracerpcaplist	131
POST packettracerpcapupload	131
GET policy lists	131
PUT policylists	131
POST policylists	132
DELETE policylists	132
DELETE portobjectgroups	132
PUT portobjectgroups	132
POST portobjectgroups	132
GET portobjectgroups	133
GET ports	133
DELETE protocolportobjects	133
PUT protocolportobjects	134
POST protocolportobjects	134
GET protocolportobjects	134

GET radiusservergroups	134
DELETE radiusservergroups	135
POST radiusservergroups	135
PUT radiusservergroups	135
DELETE ranges	135
PUT ranges	135
POST ranges	136
GET ranges	136
GET realms	136
PUT realms	136
POST realms	137
DELETE realms	137
GET realmusergroups	137
GET realmusers	137
GET route maps	138
PUT routemaps	138
POST routemaps	138
DELETE routemaps	138
DELETE securitygrouptags	138
GET securitygrouptags	139
POST securitygrouptags	139
PUT securitygrouptags	139
DELETE securityzones	139
PUT securityzones	139
POST securityzones	140
GET securityzones	140
GET SI DNS Feeds	140
GET SI DNS Lists	140
GET sinetworkfeeds	140
GET SI Network Lists	141
GET Sinkholes	141
GET siurlfeeds	141
DELETE siurllists	141
GET siurllists	142

POST siurllists	142
PUT siurllists	142
DELETE slamonitors	142
PUT slamonitors	142
POST slamonitors	142
GET slamonitors	143
GET SSO Servers	143
DELETE ssoservers	143
POST ssoservers	143
PUT ssoservers	144
GET standard access lists	144
PUT standardaccesslists	144
POST standardaccesslists	144
DELETE standardaccesslists	144
GET standard community lists	145
PUT standardcommunitylists	145
POST standardcommunitylists	145
DELETE standardcommunitylists	145
GET time ranges	145
PUT time ranges	146
POST time ranges	146
DELETE time ranges	146
GET time zone objects	146
PUT time zone objects	146
POST time zone objects	147
DELETE time zone objects	147
DELETE tunneltags	147
PUT tunneltags	147
POST tunneltags	147
GET tunneltags	147
GET umbrellaprotectionpolicies	148
POST umbrellaprotectionpolicies	148
GET urlcategories	148
DELETE urlgroups	148

PUT urlgroups	149
POST urlgroups	149
GET urlgroups	149
DELETE urls	149
PUT urls	150
POST urls	150
GET urls	150
GET Usage	150
POST validatecertfile	151
GET variablesets	151
DELETE vlangrouptags	151
PUT vlangrouptags	152
POST vlangrouptags	152
GET vlangrouptags	152
DELETE vlantags	152
PUT vlantags	153
POST vlantags	153
GET vlantags	153
Policy Services	154
DELETE accesspolicies	154
PUT accesspolicies	154
POST accesspolicies	154
GET accesspolicies	154
DELETE accessrules	154
PUT accessrules	155
POST accessrules	155
GET accessrules	155
DELETE categories	155
PUT categories	155
POST categories	156
GET categories	156
PUT defaultactions	156
GET defaultactions	156
GET loggingsettings	157

PUT loggingsettings	157
GET securityintelligencepolicies	157
GET dnspolicies	157
GET allowdnrules	158
GET blockdnrules	158
GET dynamicaccesspolicies	158
PUT dynamicaccesspolicies	158
POST dynamicaccesspolicies	158
DELETE dynamicaccesspolicies	159
GET filepolicies	159
DELETE ftdnatpolicies	159
PUT ftdnatpolicies	159
POST ftdnatpolicies	159
GET ftdnatpolicies	160
DELETE ftds2svpns	160
PUT ftds2svpns	160
POST ftds2svpns	160
GET ftds2svpns	160
PUT advancedsettings	161
GET advancedsettings	161
DELETE endpoints	161
PUT endpoints	161
POST endpoints	161
GET endpoints	162
PUT ikesettings	162
GET ikesettings	162
PUT ipsecsettings	162
GET ipsecsettings	163
GET ipsecadvancedsettings	163
PUT ipsecadvancedsettings	163
GET ipseccryptomaps	163
PUT ipseccryptomaps	164
DELETE autonatrules	164
PUT autonatrules	164

POST autonatrules 164

GET autonatrules 164

PUT autonatrules 165

DELETE manualnatrules 165

PUT manualnatrules 165

POST manualnatrules 165

GET manualnatrules 165

GET natrules 166

DELETE natrules 166

PUT inheritancesettings 166

GET inheritancesettings 166

GET identitypolicies 166

GET intrusionpolicies 167

PUT intrusionpolicies 167

POST intrusionpolicies 167

DELETE intrusionpolicies 167

GET intrusionrulegroups 168

PUT intrusionrulegroups 168

POST intrusionrulegroups 168

GET intrusionrules 168

PUT intrusionrules 169

GET networkanalysispolicies 169

PUT networkanalysispolicies 169

POST networkanalysispolicies 169

DELETE networkanalysispolicies 169

GET Inspector Configurations 170

GET inspectoroverrideconfigs 170

PUT inspectoroverrideconfigs 170

DELETE prefilterpolicies 170

PUT prefilterpolicies 170

POST prefilterpolicies 170

GET prefilterpolicies 171

GET remoteaccessvpns 171

DELETE ravpns 171

POST ravpns	171
PUT ravpns	171
GET s2svpnsummaries	172
GET addressassignmentsettings	172
PUT addressassignmentsettings	172
GET connectionprofiles	172
DELETE connectionprofiles	173
POST connectionprofiles	173
PUT connectionprofiles	173
DELETE hitcounts	173
PUT hitcounts	173
GET hitcounts	174
DELETE prefilterrules	174
PUT prefilterrules	174
POST prefilterrules	175
GET prefilterrules	175
GET snmpalerts	175
GET syslogalerts	175
GET healthpolicies	176
GET ldapattributemaps	176
PUT ldapattributemaps	176
GET policylocks	176
POST policylocks	176
GET umbrelladnpolicies	177
DELETE umbrelladnpolicies	177
POST umbrelladnpolicies	177
PUT umbrelladnpolicies	177
GET umbrelladnrules	177
PUT umbrelladnrules	178
GET flexconfigpolicies	178
POST flexconfigpolicies	178
GET ftdplatformsettingspolicies	178
GET loadbalancesettings	179
PUT loadbalancesettings	179

- POST migrate **179**
- Policy Assignment Services **179**
 - PUT policyassignments **179**
 - POST policyassignments **179**
 - GET policyassignments **180**
- Status Services **180**
 - GET taskstatuses **180**
- System Information **180**
 - GET domain **180**
 - GET serverversion **180**
- Update Packages **181**
 - POST Cancel Upgrades **181**
 - POST Retry Ugrades **181**
 - DELETE upgradepackages **181**
 - GET upgradepackages **181**
 - GET listapplicabledevices **181**
 - POST upgradepackage **182**
 - POST revertupgrades **182**
 - GET upgradepackages: Monitor **182**
 - POST upgradesnapshot **183**



CHAPTER 1

About the Management Center REST API

The management center REST API provides a lightweight API to manage a management center.

- [About the Management Center REST API, on page 1](#)
- [Whats New in 7.1, on page 1](#)
- [Whats New in 7.2, on page 4](#)
- [What's New in 7.3, on page 8](#)
- [Enabling the REST API, on page 11](#)
- [Best Practices, on page 11](#)
- [Additional Resources, on page 12](#)

About the Management Center REST API

The REST API is an application programming interface (API), based on “RESTful” principles, which you can quickly enable on any management center running version 6.1 or higher, and use with a REST client.

After installing a REST client, you can contact the specific management center's REST agent and use standard HTTP methods to access current configuration information, and issue additional configuration parameters.

Whats New in 7.1

The following new features and functionality were added in version 7.1.

- Added error
`401 Invalid Session`
- Added error
`429 Too Many Writes`
- Removed biased terminology from field names and descriptions
- Added the following new sections in API Explorer:
 - Troubleshoot
 - Network Map
 - Chassis

New API endpoints and Methods

Table 1: New Endpoints: these are new endpoints and methods.

Name	Methods	URL
Troubleshoot		
Packet Tracer Files	DELETE, DELETE by ID	/api/fmc_troubleshoot/v1/obrain/{obrainUID}/packettracer/files/
Network Map		
Netmap Hosts	GET, GET by ID, POST, DELETE	/api/fmc_netmap/v1/obrain/{obrainUID}/hosts/{objectId}
Vulns	GET, GET by ID, POST, DELETE	/api/fmc_netmap/v1/obrain/{obrainUID}/vulns/
Users		
Duo Configs	GET, GET by ID, PUT	/api/fmc_config/v1/obrain/{obrainUID}/users/duoconfigs/
Deployment Services		
Job Histories	GET, GET by ID, PUT	/api/fmc_config/v1/obrain/{obrainUID}/deployer/jobhistories
Download Reports	GET	/api/fmc_config/v1/obrain/{obrainUID}/jobhistories/{objectId}/getreport
Email Reports	POST	/api/fmc_config/v1/obrain/{obrainUID}/jobhistories/{objectId}/getreport/emailreports
Device Clusters		
Threat Defense Cluster Readiness Check	POST	/api/fmc_config/v1/obrain/{obrainUID}/devclusters/{objectId}/readinesscheck
Threat Defense Cluster Device Commands	POST	/api/fmc_config/v1/obrain/{obrainUID}/devclusters/{objectId}/getreport/fortioscmds
Health Services		
Tunnel Statuses	GET	/api/fmc_config/v1/obrain/{obrainUID}/health/tunnelstatuses
Tunnel Summaries	GET	/api/fmc_config/v1/obrain/{obrainUID}/health/tunnelsummaries
Chassis		
Management Center Managed Chassis	GET, GET by ID	/api/fmc_config/v1/obrain/{obrainUID}/chassis/managedchassis
Network Modules	GET, GET by ID, PUT	/api/fmc_config/v1/obrain/{obrainUID}/chassis/managedchassis/{objectId}/networkmodules
Sync Network Module	PUT	/api/fmc_config/v1/obrain/{obrainUID}/chassis/managedchassis/{objectId}/network/modulesync
Chassis Interfaces	GET, GET by ID	/api/fmc_config/v1/obrain/{obrainUID}/chassis/managedchassis/{objectId}/chassis/interfaces
Device Services		

Name	Methods	URL
ECMP Zones	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainUID}/zones/ecomps
Virtual ECMP Zones	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainUID}/zones/ecomps/virtual
Packet Tracer	POST	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/packet/tracer
Packet Tracer PCAP	POST	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/packet/pcap
Policy Based Routes	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/policy/routes
Virtual Policy Based Routes	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/policy/routes/virtual
VTEP Policies	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/vtep/policies
VNI Interfaces	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/vni/interfaces
Threat Defense All Interfaces	GET	/api/config/v1/chain/{chainUID}/zones/ecomps/{chainUID}/threat-defense/all/interfaces
Integration		
Dynamic Attributes Feeds	GET, PUT	/api/config/v1/chain/{chainUID}/integration/dynamic-attributes/feeds
Object		
Anyconnect External Browser Packages	GET, GET by ID	/api/config/v1/chain/{chainUID}/object/anyconnect-external-browser/packages
Bulk Dynamic Objects	POST	/api/config/v1/chain/{chainUID}/object/bulk-dynamic-objects
Extended Community Lists	GET, GET by ID, GET overrides, GET overrides by ID, OUT, POST, DELETE	/api/config/v1/chain/{chainUID}/object/extended-community-lists
Packet Tracer PCAP List	GET	/api/config/v1/chain/{chainUID}/object/packet-tracer-pcap-list
Packet Tracer PCAP Upload	POST	/api/config/v1/chain/{chainUID}/object/packet-tracer-pcap-upload
Updates		
Revert Upgrades	POST	/api/platform/v1/updates/revert-upgrades

New Methods for existing endpoints

Table 2: New Methods for Existing Endpoints: these provide additional functionality for existing endpoints

Name	Methods	URL
Device Clusters		
Threat Defense Device Cluster (existing)	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/threat-defense/cluster/{object}
Device Services		
BGP	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/devices/services/{containerUID}/routing
BGP General Settings	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/devices/services/{containerUID}/routing/general
Object		
AS Path Lists (existing)	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/aspathlists
Expanded Community Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/expandedcommunitylists
Extended Access Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/extendedaccesslists
IPv4 Prefix Lists (existing)	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/ipv4prefixlists
IPv6 Prefix Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/ipv6prefixlists
Policy Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/policyslists
Route Maps	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/routemaps
Standard Access Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/standardaccesslists
Standard Community Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/standardcommunitylists

Whats New in 7.2

No new features or functionality were added in version 7.2.

New API endpoints and Methods

Table 3: New Methods and Endpoints:

Name	Methods	URL
Chassis		
Evaluate Operation	GET	/api/fmc_config/v1/domain/{domainUID}/chassis/fmcmanagedchassis/{containerUID}/chassisinterfaces/{interfaceUID}/evaluateoperation
Breakout Interfaces	POST	/api/fmc_config/v1/domain/{domainUID}/chassis/fmcmanagedchassis/{containerUID}/operational/breakoutinterfaces

Name	Methods	URL
Join Interfaces	POST	/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/joininterfaces
Deployment		
Download Reports	GET	/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/downloadreports
Email Reports	GET	/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/emailreports
Devices		
EIGRP Routes	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/eigrproutes
Virtual EIGRP Routes	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigrproutes
Device Settings	GET, PUT	/api/fmc_config/v1/domain/{domainUUID}/devices/devicesettings
Change Managers	POST	/api/fmc_config/v1/domain/{domainUUID}/devices/operational/changemanagers
Integration		
EBS Snapshot	GET by ID, POST	/api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot
Test Umbrella Connections	POST	/api/fmc_config/v1/domain/{domainUUID}/integration/operational/testumbrellaconnections
Umbrella Connections	GET, GET by ID, PUT, POST	/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections
Status		
Task Statuses	GET	/api/fmc_config/v1/domain/{domainUUID}/job/taskstatuses
Object		
AnyConnect External Browser Packages	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages

Name	Methods	URL
AnyConnect Packages	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ anyconnectpackages
AnyConnect Profiles	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ anyconnectprofiles
Certificate Enrollments	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ certenrollment
Certificate Maps	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ certificatemaps
Group Policies	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ grouppolicies
Host Scan Packages	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ hostscanpackages
IPv4 Address Pools	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ ipv4addresspools
IPv6 Address Pools	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ ipv6addresspools
Umbrella Protection Policies	GET, POST	/api/fmc_config/v1/domain/{domainUUID}/object/ operational/umbrellaprotectionpolicies
Radius Server Groups	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ radiusservergroups
SSO Servers	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/ ssoservers
Policy		
Auto NAT Rules	PUT, DELETE	/api/fmc_config/v1/domain/{domainUUID}/policy/ ftdnatpolicies/{containerUUID}/autonatrules
Manual NAT Rules	PUT, DELETE	/api/fmc_config/v1/domain/{domainUUID}/policy/ ftdnatpolicies/{containerUUID}/manualnatrules

Name	Methods	URL
NAT Rules	DELETE	/api/fmc_config/v1/domain/{domainUUID}/policy/ftdnatpolicies/{containerUUID}/natrules
Health Policies	GET, GET by ID	/api/fmc_config/v1/domain/{domainUUID}/policy/healthpolicies
Policy Locks	GET, POST	/api/fmc_config/v1/domain/{domainUUID}/policy/operational/policylocks
RA VPNs	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns
Address Assignment Settings	PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}
Certificate Map Settings	PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/certificatemapsettings/{objectId}
Connection Profiles	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles
IPSec Advanced Settings	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecadvancedsettings
IPSec Crypto Maps	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipseccryptomaps
LDAP Attribute Maps	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps
S2S VPN Summaries	GET	/api/fmc_config/v1/domain/{domainUUID}/policy/s2svpnsummaries
Umbrella DNS Policies	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies
Umbrella DNS Rules	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules
Search		
Device	GET	/api/fmc_config/v1/domain/{domainUUID}/search/device

Name	Methods	URL
License		
Device Licenses	GET, GET by ID, PUT, PUT by ID	/api/fmc_platform/v1/license/ devicelicenses
Smart Licenses	GET, POST	/api/fmc_platform/v1/license/ smartlicenses
Updates		
Upgrade Snapshot	POST	/api/fmc_platform/v1/updates/ upgradesnapshot
Troubleshoot		
Task	POST	/api/fmc_troubleshoot/v1/domain/ {domainUUID}/task



Note Spaces have been added to the URLs to aid in readability. When using the URLs, remove the spaces.

What's New in 7.3

Backup section has been added in 7.3.

New API endpoints and Methods

Table 4: New Methods and Endpoints:

Name	Methods	URL
Backup		
Device Backup	POST	/api/fmc_config/v1/domain/{domainUUID}/backup/ operational/devicebackup
Download Backup	GET, GET by ID	/api/fmc_config/v1/domain/{domainUUID}/backup/ downloadbackup/{targetId}
Backup Files	GET, GET by ID, DELETE	/api/fmc_config/v1/domain/{domainUUID}/ backup/files
Chassis		

Name	Methods	URL
Chassis Physical Interface	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/physicalinterfaces
Devices		
Bi-Directional Forwarding Policies	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bfdpolicies
Loopback Interfaces	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/loopbackinterfaces
Device Clusters		
Cluster Health Monitor Settings	GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{containerUUID}/clusterhealthmonitorsettings/{clusterUuid}/{object_UUID}
Health		
Remote Access VPN Gateways	GET, GET by ID	/api/fmc_config/v1/domain/{domainUUID}/health/ravpngateways
Terminate VPN Sessions	POST	/api/fmc_config/v1/domain/{domainUUID}/health/ravpnsessions/operational/terminateravpnsessions
Cisco Secure Dynamic Attributes Connector	GET, POST	/api/fmc_config/v1/domain/{domainUUID}/health/csdac
Path Monitored Interfaces	GET	/api/fmc_config/v1/domain/{domainUUID}/health/pathmonitoredinterfaces
Integration		
Tunnel Deployments	GET, POST	/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments/{objectId}
Tunnel Transcripts	GET by ID	/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments/{containerUUID}/transcripts/{objectId}
Data Centers	GET	/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/datacenters

Name	Methods	URL
Umbrella Transcripts	GET by ID	/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments/{containerUUID}/transcripts/{objectId}/{object_UUID}
Object		
Bi-Directional Forwarding Templates	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/bfdtemplates
DHCP IPv6 Pools	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/dhcpipv6pools/{objectId}
Download Internal CA	POST	/api/fmc_config/v1/domain/{domainUUID}/object/downloadinternalca
Internal Certificate Authorities	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/internalcas
Internal Certificates	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/internalcertificates
Security Group Tags	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/securitygrouptags
SI URL Lists	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUUID}/object/siurllists
Validate Certificate File	POST	/api/fmc_config/v1/domain/{domainUUID}/object/validatecertfile
Policy		
Flex Config Policies	GET, GET by ID, POST	/api/fmc_config/v1/domain/{domainUUID}/policy/flexconfigpolicies

Name	Methods	URL
FTD Platform Settings	GET, GET by ID	/api/fmc_config/v1/domain/{domainUUID}/policy/ ftdplatformsettingspolicies
Load Balance Settings	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUUID}/policy/ ravpns/{containerUUID}/loadbalancesettings
Flexconfig Migration	POST	/api/fmc_config/v1/domain/{domainUUID}/policy/ flexconfigpolicies/{containerUUID}/migrate



Note Spaces have been added to the URLs to aid in readability. When using the URLs, remove the spaces.

Enabling the REST API

In management center, the REST API is enabled by default. However, if you are intending to use the REST API, you should confirm that it is enabled.



Note If you are using UCAPL mode, check that the REST API is not enabled.

- Step 1** Navigate to the gear icon for the System menu. Under that menu select `Configuration` and then `REST API Preferences`.
- Step 2** Check the box marked `Enable REST API`.
- Step 3** Click "Save". A "Save Successful" dialog will display when the REST API is enabled.

Best Practices

Cisco recommends the following best practices for optimal results with the REST API:

- Keep UI users and API users separate when possible. Especially do not use an admin account as an API user unless specifically necessary.
- Do not give API users more privilege than needed.
- Always validate the content coming from the server.
- Validate/sanitize JSON content, as it may include embedded executable code.
- If you are using CC or UCAPL mode you should disable REST API access to the management center and managed devices.

Additional Resources

Additional resources for the management center REST API can be found on Cisco DevNet at <https://developer.cisco.com/firepower/>.



CHAPTER 2

About the API Explorer

- [About the API Explorer, on page 13](#)
- [Authentication to the API Explorer, on page 13](#)
- [Accessing the Legacy API Explorer, on page 15](#)
- [Obtaining Sample Code with CodeGen, on page 15](#)
- [Viewing API Parameters, on page 17](#)

About the API Explorer

The API Explorer provides a limited interface for the REST API as well as giving a view of the abilities of the REST API.

The API Explorer resides on the management center, and can be accessed via the management center at:

```
https://<management_center_IP_or_name>:<https_port>/api/api-explorer
```

Version 6.4 uses a new API Explorer, based on the OpenAPI Specification (OAS). You can still access the legacy API Explorer if you prefer.

As part of the Open API Specification, you can use CodeGen to generate sample code. CodeGen is a utility provided with Swagger which generates API client libraries and code from the Open API Specification. For more information, see "Obtaining code with CodeGen".

This explorer provides the list of APIs available on the management center, and their details.

Note that in CDO the API Explorer runs on the CDO platform, and any calls made to the API Explorer affect the cloud-delivered management center.

Authentication to the API Explorer

The REST API relies on the same authentication as the management center. Each function in the REST API maps to permissions in the management center.

You can log into the API Explorer using any account on the management center, but you will only be able to perform the functions for which the account has permissions. For more information on setting permissions for user roles, see the *Firepower Management Center Configuration Guide*.

The first time you connect to the API Explorer you may receive an error that the connection is not secure due to an invalid certificate. You will need to add an exception in your browser to use the certificate and accept the connection.

Logging into API Explorer

The REST API uses the same authentication and permission model as the management center. See the *Firepower Management Center Configuration Guide* for more information.

Before you begin

Make sure you have an account on your management center with the required permissions to perform the tasks you want to perform using the REST API.

Step 1 Navigate to the following URL: `https://<management_center_IP_or_name>:<https_port>/api/api-explorer`

If you experience an extended load time for the logon screen when using a Firefox browser, enter **about:support** in the search bar and click the **Refresh Firefox** option, then view the management center interface with self-signed certificates in the same Firefox browser. For more information, see <https://support.mozilla.org/en-US/kb/refresh-firefox-reset-add-ons-and-settings>.

Step 2 Log in with your username and password and click "Sign In"

What to do next

Locate the desired resource and request.

Setting the Domain

The REST API can perform functions globally, in the default domain, or in specific domains.

Before you begin

You must have a configured management center, an account with permissions to access the REST API in one or more domains configured on your management center.

In the upper right, drop down the `Domains` menu and select the desired domain.

What to do next

Locate the desired resource and request type.

Accessing the Legacy API Explorer

The API Explorer has changed for 6.4.0. While the newer API Explorer retains nearly all of the previous functionality, some users may prefer the older interface.

Before you begin



Note The Legacy Explorer will be removed in future releases of management center. Please use the Open API Specification for access to current REST API functionality in the future.

Make sure you have an account on your management center with the required permissions to perform the tasks you want to perform using the REST API.

Log in to the API Explorer at https://<management_center_IP_or_name>:<https_port>/api/api-explorer.

In the upper right-hand corner click on `Legacy Explorer`.

What to do next

Use the Legacy API Explorer as you would normally.

Obtaining Sample Code with CodeGen

You can use the CodeGen utility on the Open API Spec to generate sample code in a number of different languages. This utility is an open-source tool you can download online. The resultant code is meant primarily as an educational and bootstrapping tool.

The CodeGen utility creates sample code for the entire Open API Spec. As such, it generates sample code for every allowed method and endpoint in the REST API. The sample code can be in a variety of languages, including HTML, Perl, Python, and Java.

For complete documentation of the CodeGen utility go to <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

Downloading the Open API Spec

The Open API Spec is a standardized specification of a REST API. The Open API Spec for the management center REST API contains details about the endpoints, fields, parameters, and requirements of the API. You can use the API Spec to generate sample code as well as find specific information about API functionality.

The Open API Spec is a JSON file. It can be read by most text editors.

Before you begin

Have an account on the management center which is able to access the API Explorer.

Make sure that your browser is able to download from sites with self-signed certificates.

-
- Step 1** Open API Explorer using the steps given in [Logging into API Explorer, on page 14](#)
- Step 2** Click on `Download Spec` in the upper right corner. Depending on your browser configuration, you will either be given a prompt to save the file, or be shown the file directly.
- Step 3** Save the file. Be sure to note the destination and filename.
-

What to do next

Run the CodeGen utility on the downloaded file.

Generating Sample Code with the CodeGen Utility

The Swagger CodeGen utility allows you to generate sample code from an Open API Spec. This sample code can be in a variety of languages including Java, HTML, Python, and Perl.

Before you begin

Download the Swagger CodeGen Utility. See [Obtaining Sample Code with CodeGen, on page 15](#).

Have a Java Runtime Environment installed on your computer

Download the management center REST API Open API Spec. See [Downloading the Open API Spec, on page 15](#).

Set environment variables to allow you to run the CodeGen utility

From the command line, run the command `java -jar ./swagger-codegen-cli-<VERSION>.jar generate -o <OUTPUT_PATH> -l <LANGUAGE> -i <OPEN_API_SPEC_FILE>`

Example:

```
java -jar ./swagger-codegen-cli-2.3.1.jar generate -o C:\work\code\api_schema\html -l html -i
fmc_swagger.json
```

<VERSION> is the specific version of the CodeGen utility you are using. It must match the filename of the CodeGen .jar file.

<OUTPUT_PATH> is the path to which you want to output the generated code.

<LANGUAGE> is the language which you want CodeGen to generate. Suggested options include `html`, `java`, `perl`, and `python`. Other options are possible, check the CodeGen documentation for the complete list of choices.

<OPEN_API_SPEC_FILE> is the Open API Spec file which you downloaded. This is the source from which CodeGen is generating example code. Without it, CodeGen cannot provide output.

What to do next

Find the generated code in the output path and use as desired. Generated code should be considered an example, and may not perform as desired unless modified to meet your needs.

Viewing API Parameters

Each resource has a set of parameters and fields associated with it. You can view the parameters and fields by performing any of the supported operations for that resource within API Explorer.

Before you begin

You must have a configured management center and an account on that management center with the permissions required to use the desired REST API functions.

-
- Step 1** Open API Explorer. See [Logging into API Explorer, on page 14](#).
 - Step 2** Select the desired resource.
 - Step 3** Select one of the supported operations for that resource.
-



CHAPTER 3

Connecting with a Client

You can access the REST API using any REST API client. Typically REST API clients are available as browser plugins, but any REST API client is allowed.



Note If connecting to the REST API for the first time, you will receive a certificate warning. You need to accept the certificate in order to use the REST API.

- [Authentication from a REST API Client, on page 19](#)

Authentication from a REST API Client


Cisco recommends that you use different accounts for interfacing with the API and the User Interface. Credentials cannot be used for both interfaces simultaneously, and will be logged out without warning if used for both.

The first time you connect to the REST API you may receive an error that the connection is not secure due to an invalid certificate. Add an exception in your browser to use the certificate and accept the connection.

With Token Based Authentication you obtain a token by providing your username and password. You use this token to access an HTTP service for a limited time period without the need for the username and password with every request. In other words, to eliminate the need for authenticating with your username and password with each request, you replace user credentials with a uniquely generated access token, which you use for accessing resources for up to 30 minutes and can refresh up to three times.

The diagram below illustrates the concept of token-based authentication:

Token-Based Authentication

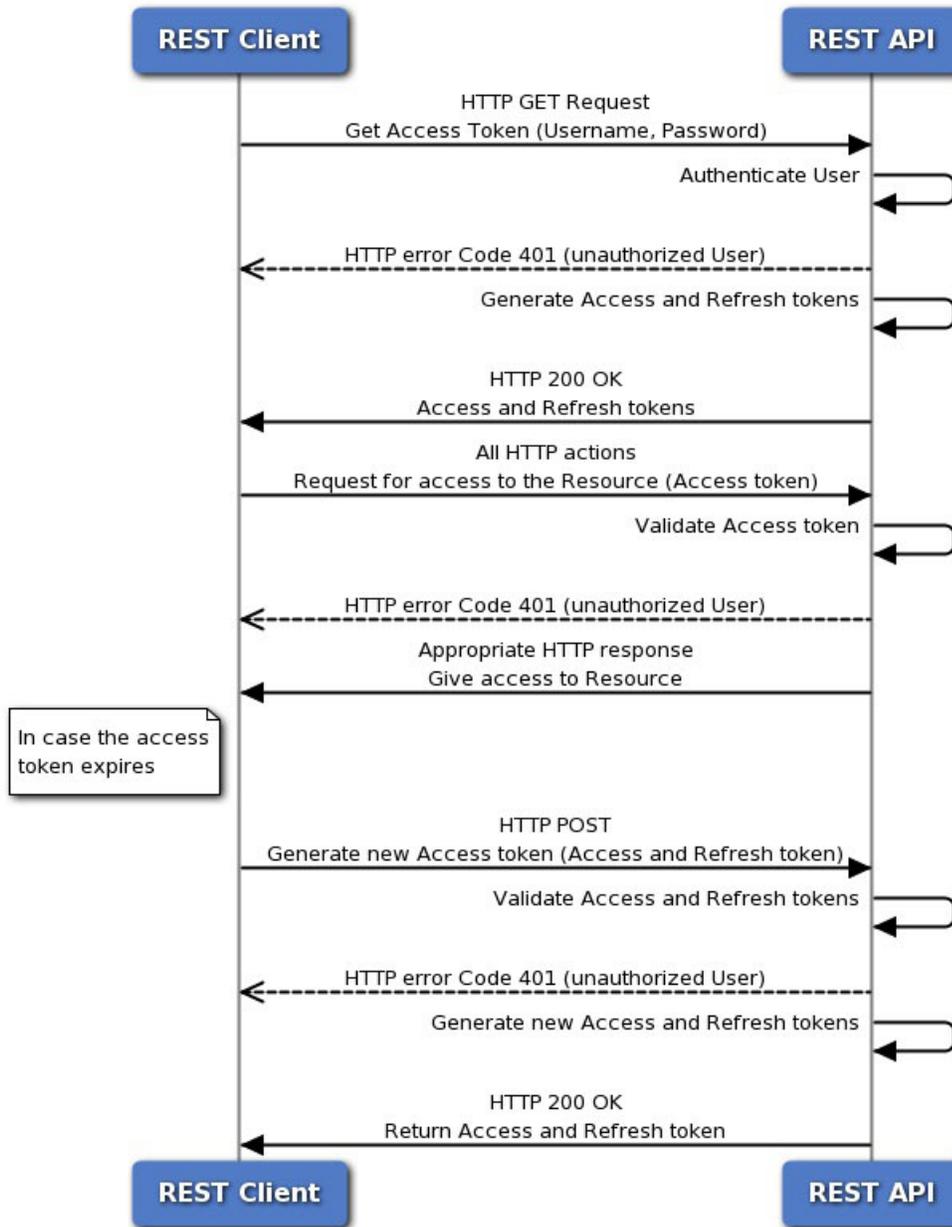

Requesting an Authentication Token

The Token Generation Utility provides an authentication token which can be used in your REST API client.

Before you begin

You must have a configured management center and an account on that center with credentials to use the REST API. You must also have a REST API Client which can perform basic authentication.

-
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/generatetoken.`
- Step 3** Include the username and password as a basic authentication header. The POST body should be blank.
-

What to do next

Add the header `X-auth-access-token:<authentication token value>` in requests to the API.

Add the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>` in requests to refresh the token as described in [Authentication from a REST API Client, on page 19](#)

Use the `Domain_UUID` from the authentication token in all REST requests to the server.

Refreshing an Authentication Token

management center REST API authentication tokens are valid for 30 minutes, and can be refreshed up to three times.

Before you begin

Obtain valid authentication and refresh tokens from the management center REST API. Ensure these tokens have been refreshed less than three times.

-
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/refresh-token` with the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>`.
-

What to do next

Add the header `X-auth-access-token:<new authentication token value>` in requests to the API.

Add the header `X-auth-refresh-token:<new refresh token value>` in requests to refresh the token.



CHAPTER 4

Objects in the REST API

- [Request Structure](#), on page 23
- [Bulk Rule Posting](#), on page 25
- [Response Structure](#), on page 26
- [Rate Limiting](#), on page 28
- [Payload Limiting](#), on page 28
- [Object Overrides](#), on page 29
- [Field Renaming](#), on page 30
- [Troubleshoot](#), on page 30
- [Network Map](#), on page 31
- [Audit Services](#), on page 32
- [Users](#), on page 32
- [Deployment Services](#), on page 34
- [Device Group Services](#), on page 36
- [Device Clusters](#), on page 36
- [Device HA Pair Services](#), on page 39
- [Device Services](#), on page 42
- [Health Services](#), on page 74
- [Backup](#), on page 76
- [Chassis](#), on page 77
- [Intelligence Services](#), on page 80
- [License](#), on page 84
- [Search](#), on page 85
- [Integration Services](#), on page 86
- [Object Services](#), on page 92
- [Policy Services](#), on page 154
- [Policy Assignment Services](#), on page 179
- [Status Services](#), on page 180
- [System Information](#), on page 180
- [Update Packages](#), on page 181

Request Structure

Request Structure:

Requests are sent to the management center as HTTPS requests with the Uniform Resource Identifier (URI) of the form described below:

```
https://<management_center_IP_or_name>:<https_port>/<object_URL>/object_UUIDoptions
```

Where:

- <management_center_IP_or_name>
is the IP address or Fully Qualified Domain Name of the management center
- <https_port>
is the port number used by the management center for HTTPS connections. This port is always 443.
- <object_URL>
is the specific URL for the desired resource. These URLs are unique for each resource and are given below.
- *options*
are the options given with the request. Options can be used to modify the output and filter results.
- {*UUID*}
Many URLs contain one or more UUIDs which must be specified. Most URIs include the domain UUID, which can be found in the Authentication Token. When deleting or modifying an object, or requesting information about a specific object, the URI will end with the object UUID.

Available request methods are:

- GET
– Retrieves data from the specified object. GET is a read-only operation.
- PUT
– Adds the supplied information to the specified object; returns a 404 Resource Not Found error if the object does not exist.



Note Currently PUT may be used to create a new object, but this ability may be removed in later releases. Use POST to create new objects and PUT to modify existing objects.

- POST
– Creates the object with the supplied information. POST operations should be followed with a payload consisting of the JSON object to be created, enclosed in braces:

```
{object}
```



Note The maximum number of rules you can use depends on memory of the device. There is no set limit, because complex rules use more memory. For rule performance and optimization guidelines, see the management center Configuration Guide.

- DELETE
 - Deletes the specified object.
- PATCH
 - **Not supported.**

The API supports query parameters for almost all requests. For GET requests, the following query parameters can be used to control the number of returned objects and the pagination:

- `expanded`
 - This is a True/False value which indicates whether you get a full listing of an item in a list or only a reference. Some fields will only show if this flag is set to true.
- `offset`
 - Indicates the position in the list where you want to start.
- `limit`
 - Indicates the number of items you want to retrieve in a page.

The API supports filtering on the basis of query parameters passed with a request. Filtering can be done based on specific attributes in a model. The parameters available for filtering vary by object, and are listed with the request below.

Bulk Rule Posting

Multiple access control rules can be added with a POST command using the bulk insert feature. This feature allows as many as 1,000 rules to be added at once.

This feature is only available for access rules.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{policy_UUID}/accessrules?bulk=true
```

The option:

```
?bulk=true
```

indicates that that multiple rules will be used in the payload of this request.

All objects in the payload of the bulk POST request must be of the same type. You cannot mix different objects in the same bulk request.

Unlike a normal POST operation, the bulk POST requires a list of JSON objects. This list may have as many as 1,000 objects or as few as one. The individual JSON objects must be enclosed in braces. Each object must be separated by commas, and the entire list is enclosed in brackets:

```
[{object}]
[{object1},{object2},{object3},{object4},{object5} ...]
```

The following query parameters are supported in bulk POST requests:

- `bulk=true`
 - This parameter specifies that the bulk POST feature is being used in the query. This parameter is **required** for bulk rule posting.

- `section=mandatory/default`

This parameter specifies the section into which the rules will be added. If this parameter is not used the section will be the default section. Only `mandatory` and `default` are allowed values. If a section is specified it must exist or the request will fail. If a section is specified, a category cannot be specified.

- `category=<Name of the category>`

This parameter specifies the category into which the rules will be added. If a category is specified it must exist or the request will fail. If a category is specified, a section cannot be specified.

- `insertAfter=<Index of rule>`

This parameter specifies that the rules will be inserted after the specified rule index. If no section or category is specified, the rules will be added to the section or category after the insertion point.

- `insertBefore=<Index of rule>`

This parameter specifies that the rules will be inserted before the specified rule index. If no section or category is specified, the rules will be added to the section or category before the insertion point. `insertBefore` takes precedence over `insertAfter` - if both are specified, the `insertBefore` parameter will apply.

When a rule or group of rules are inserted at an index which is part of either a section or a category, the category or section parameter can be used along with index to specify the insertion location of the rule(s). If an index is given along with a section or category, but the index is not in that section or category, you will receive an error.

If no index is specified, rules will be inserted after the end of the access policy. If a category or section is specified but no index is specified, rules will be inserted at the end of the category or section.

In any given POST all of the rules will be inserted at a single point. You cannot specify multiple insertion locations in a POST request.



Note Rule order affects how orders are parsed by the management center.

Response Structure



Note The REST API will serve only 25 results per page. This can be increased up to 1000 using the `limit` query parameter.

The response structure can be:

- **LOCATION** – Newly created resource ID; for POST only—holds the new resource ID (as a URI representation).
- **CONTENT-TYPE** – Media type describing the response message body; describes the representation and syntax of the response message body.
- Each response includes an HTTP status or error code. Available codes fall into these categories:

- 20x - A two-hundred series code indicates successful operation, including:
 - 200 200
 - "OK". Standard response for successful requests.
 - 201 201
 - "Created". Request completed; new resource created.
 - 202 202
 - "Accepted". Request accepted, but processing not complete.
 - 204 204
 - "No Content". Server successfully processed request; no content is being returned.
- 4xx - A four-hundred series code indicates a client-side error, including:
 - 400 400
 - "Bad Request". Invalid query parameters, including unrecognized parameters, missing parameters, or invalid values.

This can indicate that the object was edited or deleted via REST API such that the corresponding policy is invalidated.
 - 401 Invalid Session
 - Invalid session.
 - 404 404
 - "Not Found". The provided URL does not match an existing resource. For example, an HTTP DELETE may fail because the resource is unavailable.
 - 405 405
 - "Method Not Allowed". An HTTP request was presented that is not allowed on the resource; for example, a POST on a read-only resource.
 - 422 422
 - "Unprocessable Entity". The payload is too large. This will occur when you send a payload greater than 2048000 bytes.
 - The payload contains an unprocessable or unreadable entity such as a invalid attribut name or incorrect JSON syntax.
 - 429 Too Many Writes
 - Parallel add/update/delete operations are blocked. Please retry the request.
 - 429 429
 - "Too Many Requests". Too many requests were sent to the API. This error will occur if you send more than 120 requests per minute.
 - Too many concurrent requests. The system cannot accept more than 10 parallel requests from all clients.
 - Too many write operations per server. The API will only allow one PUT, POST, or DELETE request per user on a server at a time.

- 5xx - A five-hundred series code indicates a server-side error.

In the case of an error, in addition to the error code, the return response may include an error object containing more details about the error. The JSON error/warning response schema is as follows:

```
{
  "error": {
    "category": "FRAMEWORK",
    "messages": [
      {
        "description": "Action is mandatory to be specified."
      }
    ],
    "severity": "ERROR"
  }
}
```

where the object properties are:

Table 5: Object Properties

Property	Type	Description
messages	List of Dictionaries	List of error or warning messages
code	String	Error/Warning/Info code
details	String	Detailed message corresponding to Error/Warning/Info

Rate Limiting

The management center REST API implements rate limiting to reduce network load.

The API will accept no more than 120 messages per minute from an individual IP address. It will only allow 10 simultaneous connections per IP address. These are not configurable parameters.

If a client exceeds these limits, the API will give an HTTP 429 error.

Payload Limiting

The API cannot accept a message with a payload greater than 2048000 bytes. This applies to both the REST API and to API Explorer. This is not a configurable parameter.

If a message exceeds this limit, the API will give an HTTP 422 error.

Object Overrides

An override defines an alternate value for an object, which the system uses for the device or domain specified. In a single request user can create multiple overrides for multiple objects using bulk operation.

When an object is overridden, the alternate values will be provided for that object when it is requested. This does not overwrite the original values, which will return if the override is removed. The override gives alternate values for all fields in the object except for the `Name` and `Description` fields.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{Domain_uuid} /object/hosts
```

Request payload to create an override for object “testhost” on domain “Global \ RETAIL” with the override value being “1.2.3.5”:

```
{
  "type": "Host",
  "value": "1.2.3.5",
  "overrides": {
    "parent": {
      "id": <Parent UUID>
      "type": "Host"
    },
    "target": {
      "name": "Global \ RETAIL",
      "id": <target domain UUID>,
      "type": "Domain"
    }
  },
  "overridable": true,
  "description": " ",
  "name": "testhost",
}
```

Optional:

```
?bulk=true
```

indicates the override creation for more than one object.

GET:

URL to list all overrides on a particular object:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides
```

URL for override for an object on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}
```

URL for all the overrides on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}
```



Note When overridden, the parent object value will never change.

Field Renaming

The following fields have been renamed to remove biased terminology in the documentation. Note that the old fields are entirely replaced as of version 7.1 and no longer exist.

Table 6:

Name	URL	Previous Field Name	New Field Name
ftdddevicecluster	/api/fmc/v1/domain/{domainUUID}/devices/ftdddevicecluster	masterDevice	controlDevice
		master_device_UUID	control_device_UUID
		slaveDevices	dataDevices
		slave1_device_UUID	data1_device_UUID
		slave2_device_UUID	data2_device_UUID
		slave3_device_UUID	data3_device_UUID
Observable	/api/fmc/v1/domain/{domainUUID}/observable	whitelist	allowlist
Indicator	/api/fmc/v1/domain/{domainUUID}/indicator	whitelist	allowlist
Incident	/api/fmc/v1/domain/{domainUUID}/incident	whitelist	allowlist
Source	/api/fmc/v1/domain/{domainUUID}/source	whitelist	allowlist

Troubleshoot

DELETE packettracerfiles

Request Type: **DELETE**

Description: Deletes PCAP files from management center. If no ID is specified, deletes all packet tracer files from the management center.

URL: /api/fmc_troubleshoot/v1/domain/{domainUUID}/packettracer/files/

URL for Delete by ID:

/api/fmc_troubleshoot/v1/domain/{domainUUID}/packettracer/files/{pcapFileName}

Permissions: Devices > Troubleshoot > Packet Tracer > Modify Packet Tracer

POST task

Request Type: **POST**

Description: Creates a job or task.

URL: /api/fmc_troubleshoot/v1/domain/{domainUUID}/task

Permissions: Deploy Configuration to Devices.

Network Map

GET netmaphosts

Request Type: **GET**

Description: Retrieves a host associated with the ID in the Network Map. If no ID is specified, retrieves list of all hosts in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}`

URL for GET by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: ipAddress

DELETE netmaphosts

Request Type: **DELETE**

Description: Deletes the specified host in the Network Map. If no ID is specified, deletes the entire Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/`

URL to delete a specific host: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST netmaphosts

Request Type: **POST**

Description: Creates a host in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts`

Permissions: Object Manager > Modify Object Manager

GET vulns

Request Type: **GET**

Description: Retrieves the vulnerability in the Network Map with the specified ID. If no ID is specified, retrieves list of all vulnerabilities in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/`

URL for GET by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/{objectId}/`

Permissions: Policies > Network Discovery

Parameters available for filtering: ipAddress, source, port, protocol, id

DELETE vulns

Request Type: **DELETE**

Description: Deletes the the vulnerability in the Network Map with the specified ID. If no ID is specified, deletes all vulnerabilities in the Network Map.

URL: /api/fmc_netmap/v1/domain/{domainUUID}/vulns

URL for DELETE by ID: /api/fmc_netmap/v1/domain/{domainUUID}/vulns/{objectId}

Permissions: Policies > Network Discovery > Modify Network Discovery

Parameters available for filtering: ipAddress, source, port, protocol, id

source must be included for DELETE

POST vulns

Request Type: **POST**

Description: Creates a vulnerability in the Network Map.

URL: /api/fmc_netmap/v1/domain/{domainUUID}/vulns

Permissions: Policies > Network Discovery > Modify Network Discovery

Audit Services

GET auditrecords

Request Type: **GET**

Description: Retrieves audit records.

URL: /api/fmc_config/v1/domain/{domain_UUID}/audit/auditrecords

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/audit/auditrecords/{objectId}

Permissions: System > Monitoring > Audit

Parameters available for filtering: username, subsystem, source, starttime, endtime

Users

GET authroles

Request Type: **GET**

Description: Retrieves the list of all existing user roles in the system.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/authroles`

Permissions: System > User Management

Parameters available for filtering: none

GET SSO Config

Request Type: **GET**

Description: Retrieves the Single Signon Configuration for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/ssosconfigs/{objectId}`

Permissions: System > User Management > Single Sign-On

Parameters available for filtering: none

PUT SSO Config

Request Type: **PUT**

Description: Modifies the Single Signon configuration for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/ssosconfigs/{objectId}`

Permissions: System > User Management > Single Sign-On

GET duoconfigs

Request Type: **GET**

Description: Retrieves the Duo configuration associated with the specified ID. If no ID is specified, retrieves list of all Duo configurations.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/{objectId}`

Permissions: System > User Management > Users

PUT duoconfigs

Request Type: **PUT**

Description: Modifies the Duo configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/{objectId}`

Permissions: System > User Management > Users

Deployment Services

GET deployabledevices

Request Type: **GET**

Description: Retrieves list of all devices with configuration changes, ready to be deployed.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deployabledevices`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: name

GET deployments

Request Type: **GET**

Description: Retrieves deployment details for device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/deployments`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: startTime, endTime

GET pendingchanges

Request Type: **POST**

Description: Retrieves all the policy and object changes for the selected device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/pendingchanges`

Permissions: Deploy Configuration to Devices

POST deploymentrequests

Request Type: **POST**

Description: Creates a request for deploying configuration changes to the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deploymentrequests/{object_UUID}`

Permissions: Deploy Configuration to Devices

GET jobhistories

Request Type: **GET**

Description: Retrieves the specified deployment job. If no ID is provided, retrieves all the deployment jobs.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{objectId}`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: Various filter criteria can be specified using the format

`deviceUUID:{uuid};startTime:start_time_in_secs;endTime:end_time_in_secs;rollbackApplicable:true_or_false`

PUT jobhistories

Request Type: **PUT**

Description: Modifies the the deployment job with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{objectId}`

Permissions: Deploy Configuration to Devices

GET downloadreports

Request Type: **GET**

Description: Retrieves the report for download.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/downloadreports`

Permissions: Overview > Reporting

POST emailreports

Request Type: **POST**

Description: Emails the deployment report.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/emailreports`

Permissions: Overview > Reporting

POST rollbackrequests

Request Type: **POST**

Description: Creates a request for rollback configuration to devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/rollbackrequest`

Permissions: Deploy Configuration to Devices

Device Group Services

DELETE devicegrouprecords

Request Type: **DELETE**

Description: Deletes a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT devicegrouprecords

Request Type: **PUT**

Description: Modifies a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST devicegrouprecords

Request Type: **POST**

Description: Creates a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords`

Permissions: Devices > Device Management > Modify Devices

GET devicegrouprecords

Request Type: **GET**

Description: Retrieves the device group associated with the specified ID. If no ID is specified, retrieves list of all device groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > View Devices

Device Clusters

GET ftddevicecluster

Request Type: **GET**

Description: Retrieves or modifies the threat defense Cluster record associated with the specified ID. If no ID is specified for a GET, retrieves list of all threat defense Clusters.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > View Devices

PUT ftddevicecluster

Request Type: **PUT**

Description: Modifies the threat defense Cluster record associated with the specified ID.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > Modify Devices

POST ftddevicecluster

Request Type: **POST**

Description: Creates an threat defense Cluster record.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/

Permissions: Devices > Device Management > Modify Devices

DELETE ftddevicecluster

Request Type: **DELETE**

Description: Deletes the threat defense Cluster record associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > Modify Devices

POST ftdclusterreadinesscheck

Request Type: **POST**

Description: Represents Cluster compatibility status for control(Readiness to become control) and data devices(compatible with control). This Readiness check is for platforms that support cluster bootstrap from management center (for e.g.4200).

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftdclusterreadinesscheck

Permissions: Devices > Device Management > Modify Devices

Parameters available for filtering: `skipControlReadiness`: This is a query parameter, if given as true (`skipControlReadiness=true`) skips control readiness check and performs data devices compatibility with control.

POST ftdclusterdevicecommands

Request Type: **POST**

Description: Executes given command on the threat defense Cluster.

URL:

/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/{containerUUID}/operational/ftdclusterdevicecommands

Filters available for use: Filter are `operation` and `deviceUUID`. Value of filter is of format:

```
deviceUUID:device
    uuid;operation:{enable|disable|control}
```

. deviceUUID is UUID of device and is a mandatory field. operation is the command that needs to be executed on device and is a mandatory field.

Permissions: Devices > Device Management > Modify Devices

GET clusterhealthmonitorsettings

Request Type: **GET**

Description: Retrieves the health check monitor settings of the Firewall Threat Defense Cluster.

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftdddevicecluster/{containerUUID}/clusterhealthmonitorsettings/{clusterUUID}/{object_UUID}
```

Permissions: Devices > Device Management

PUT clusterhealthmonitorsettings

Request Type: **PUT**

Description: Modifies the health check monitor settings of the Firewall Threat Defense Cluster.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftdddevicecluster/{containerUUID}/clusterhealthmonitorsettings/{clusterUUID}
```

Permissions: Devices > Device Management > Modify Devices

Device HA Pair Services

DELETE ftddevicehapair

Request Type: **DELETE**

Description: Deletes a device high availability pair with the specified object ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{object_UUID}

Permissions: Devices > Device Management > Modify Devices



Note Run the *configure high-availability disable* command to remove the failover configurations from threat defense devices.

PUT ftddevicehapair

Request Type: **PUT**

Description: Sets any one of the following actions for the threat defense high availability device:

- Sets the failover trigger criteria for the device
- Switches states within the device
- Breaks or force-breaks the device

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST ftddevicehapairs

Request Type: **POST**

Description: Creates a high availability device pair with the specified primary and secondary object IDs. Do not perform the POST operation for more than one high availability pair at a time. Ensure that the current POST operation is completed successfully before proceeding to the next POST operation.



Note Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses, on page 180](#).

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs`

Permissions: Devices > Device Management > Modify Devices

GET ftddevicehapairs

Request Type: **GET**

Description: Retrieves the details associated with the specified high availability container ID. If no ID is specified, retrieves a list of all high availability container objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}`

Permissions: Devices > Device Management > Modify Devices

DELETE failoverinterfacemacaddressconfigs

Request Type: **DELETE**

Description: Deletes the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/failoverinterfacemacaddressconfigs`

Permissions: Devices > Device Management > Modify Devices

GET failoverinterfacemacaddressconfigs

Request Type: **GET**

Description: Retrieves the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense HA pair. If no ID is specified for a GET, it retrieves the list of all threat defense high availability failover policy interface MAC addresses records.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

URL for GET by ID :

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}
```

Permissions: Devices > Device Management

POST failoverinterfacemacaddressconfigs

Request Type: **POST**

Description: Creates the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

Permissions: Devices > Device Management > Modify Devices

PUT failoverinterfacemacaddressconfigs

Request Type: **PUT**

Description: Modifies the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}
```

Permissions: Devices > Device Management > Modify Devices

GET monitoredinterfaces

Request Type: **GET**

Description: Retrieves the threat defense high availability Monitored interface policy record associated with the specified threat defense HA pair. If no ID is specified for a GET, it retrieves the list of all threat defense high availability monitored interface policy records.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces
```

URL for GET by ID :

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

PUT monitoredinterfaces

Request Type: **PUT**

Description: Modifies the threat defense high availability Monitored interface policy record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces
```

Permissions: Devices > Device Management > Modify Devices

Device Services

POST copyconfigrequests

Request Type: **POST**

Description: Copies device configuration to the specified threat defense device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/copyconfigrequests

Permissions: Devices > Device Management > Modify Devices

POST exports

Request Type: **POST**

Description: Package and export device configuration of specified threat defenses

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/operational/exports

Permissions: System > Tools > Import/Export

POST imports

Request Type: **POST**

Description: Import device configuration from specified source for threat defenses.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/operational/imports

Permissions: System > Tools > Import/Export

GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}

Permissions: Devices > Device Management

PUT bgp

Request Type: **PUT**

Description: Modifies BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}

Permissions: Devices > Device Management > Modify Devices

POST bgp

Request Type: **POST**

Description: Creates BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp

Permissions: Devices > Device Management > Modify Devices

DELETE bgp

Request Type: **DELETE**

Description: Deletes the specified bgp object.

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}

Permissions: Devices > Device Management > Modify Devices

DELETE devicerecords

Request Type: **DELETE**

Description: Unregisters the specified device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}

Permissions: Devices > Device Management > Modify Devices

PUT devicerecords

Request Type: **PUT**

Description: Modifies the device record associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}

Permissions: Devices > Device Management > Modify Devices

POST devicerecords

Request Type: **POST**

Description: Registers the specified device to the management center.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords

Permissions: Devices > Device Management > Modify Devices

GET devicerecords

Request Type: **GET**

Description: Retrieves device information. If a device ID is specified, the information for the specified device is retrieved. If no ID is specified, retrieves information for all devices.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: hostName

PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object_UUID}

Permissions: Devices > Device Management > Modify Device

GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces/{object_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

DELETE fplogicalinterfaces

Request Type: **DELETE**

Description: Deletes logical interfaces on the specified device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fplogicalinterfaces/{object_UUID}

Permissions: Devices > Device Management > Modify Device

PUT fplogicalinterfaces

Request Type: **PUT**

Description: Modifies a logical interface on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces/{object_UUID}

Permissions: Devices > Device Management > Modify Device

POST fplogicalinterfaces

Request Type: **POST**

Description: Creates logical interfaces on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces

Permissions: Devices > Device Management > Modify Device

GET fplogicalinterfaces

Request Type: **GET**

Description: Retrieves the logical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all logical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces/{object_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

DELETE inlinesets

Request Type: **DELETE**

Description: Deletes inline sets on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

PUT inlinesets

Request Type: **PUT**

Description: Modifies an inline set on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

POST inlinesets

Request Type: **POST**

Description: Creates inline sets on the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets`

Permissions: Devices > Device Management > Modify Device

GET inlinesets

Request Type: **GET**

Description: Retrieves information on the inline set associated with the specified NGIPS device ID and inline set ID. If no inline set ID is specified, retrieves list of all inline sets associated with the specified NGIPS device ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

GET Metrics

Request Type: **GET**

Description: Retrieves HealthMonitor metrics for the device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/metrics`

Permissions: Devices > Device Management

Parameters available for filtering: metric

GET staticroutes

Request Type: **GET**

Description: Retrieves the static route associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all static routes associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroute`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

GET virtualrouters

Request Type: **GET**

Description: Retrieves the the virtual router with the specified ID. If no ID is specified, retrieves list of all virtual routers.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management

PUT virtual routers

Request Type: **PUT**

Description: Modifies a virtual router on the specified device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management > Modify Device

POST virtual routers

Request Type: **POST**

Description: Creates virtual routers associated with the specified container.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters`

Permissions: Devices > Device Management > Modify Device

DELETE virtual routers

Request Type: **DELETE**

Description: Deletes the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management > Modify Device

GET virtual BGP

Request Type: **GET**

Description: Retrieves specified BGP (ipv4 and ipv6) on the specified virtual router. If no ID is specified, retrieves list of all BGP on the virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`

Permissions: Devices > Device Management

PUT virtual bgp

Request Type: **PUT**

Description: Modifies BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST virtual bgp

Request Type: **POST**

Description: Creates BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp`

Permissions: Devices > Device Management > Modify Devices

DELETE virtual bgp

Request Type: **DELETE**

Description: Deletes BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET virtual ipv4staticroutes

Request Type: **GET**

Description: Retrieves specified IPv4 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv4 static routes on the virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

PUT virtual ipv4 static routes

Request Type: **PUT**

Description: Modifies an IPv4 static route on the specified device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

POST virtual ipv4 static routes

Request Type: **POST**

Description: Creates IPv4 static routes associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes`



Note For static routes (IPv4), the methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

DELETE virtual ipv4 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv4 static route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

GET virtual ipv6staticroutes

Request Type: **GET**

Description: Retrieves specified IPv6 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv6 static routes on the virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

PUT virtual ipv6 static routes

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

`/api/fire_config/v1/drain/{drainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

POST virtual ipv6 static routes

Request Type: **POST**

Description: Creates IPv6 static routes associated with the specified virtual router.

URL:

`/api/fire_config/v1/drain/{drainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

DELETE virtual ipv6 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv6 static route.

URL:

`/api/fire_config/v1/drain/{drainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

GET virtual ospf interface

Request Type: **GET**

Description: Retrieves specified OSPF interface associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF interfaces associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}`

Permissions: Devices > Device Management

GET virtual ospfv2 routes

Request Type: **GET**

Description: Retrieves specified OSPFV2 process associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF v2 process associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes/{objectId}`

Permissions: Devices > Device Management

GET virtual static routes

Request Type: **GET**

Description: Retrieves specified static routes (ipv4 and ipv6) associated with the specified virtual router. If no ID is specified, retrieves list of all Static routes (ipv4 and ipv6) associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

DELETE ipv4staticroutes

Request Type: **DELETE**

Description: Deletes the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

PUT ipv4staticroutes

Request Type: **PUT**

Description: Modifies the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

POST ipv4staticroutes

Request Type: **POST**

Description: Creates an IPv4 Static Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes`

Permissions: Devices > Device Management > Modify Devices

GET ipv4staticroutes

Request Type: **GET**

Description: Retrieves the IPv4 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv4 Static Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes`

URL for GET ID::

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management

DELETE ipv6staticroutes

Request Type: **DELETE**

Description: Deletes the IPv6 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT ipv6staticroutes

Request Type: **PUT**

Description: Modifies the IPv6 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST ipv6staticroutes

Request Type: **POST**

Description: Creates an IPv6 Static Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes`

Permissions: Devices > Device Management > Modify Devices

GET ipv6staticroutes

Request Type: **GET**

Description: Retrieves the IPv6 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv6 Static Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes`

URL for GET ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management

GET ospf interface

Request Type: **GET**

Description: Retrieves the OSPF interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all OSPF interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}`

Permissions: Devices > Device Management

GET ospfv2routes

Request Type: **GET**

Description: Retrieves OSPF V2 routes associated with the specified ID. If no ID is specified, retrieves list of all OSPF v2 routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes/{objectId}`

Permissions: Devices > Device Management

GET ospfv3interfaces

Request Type: **GET**

Description: Retrieves OSPF v3 interface associated with the specified ID. If no ID is specified, retrieves a list of all OSPF v3 interfaces.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces/{objectId}
```

Permissions: Devices > Device Management

GET ospfv3routes

Request Type: **GET**

Description: Retrieves the OSPFv3 process associated with the specified ID. If no ID is specified, retrieves list of all OSPFv3 processes.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes/{objectId}
```

Permissions: Devices > Device Management

GET ecmpzones

Request Type: **GET**

Description: Retrieves the ECMP Zone associated with the specified ID. If no ID is specified, retrieves list of all ECMP Zones.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}
```

Permissions: Policies > Network Discovery > Custom Topology

PUT ecmpzones

Request Type: **PUT**

Description: Modifies the ECMP Zone associated with the specified ID.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}
```

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

POST ecmpzones

Request Type: **POST**

Description: Creates an ECMP Zone.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

DELETE ecmpzones

Request Type: **DELETE**

Description: Deletes the ECMP Zone associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

GET virtual ecmpzones

Request Type: **GET**

Description: Retrieves the ECMP Zone for the specified virtual router associated with the specified ID. If no ID is specified, retrieves list of all ECMP Zones.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology

PUT virtual ecmpzones

Request Type: **PUT**

Description: Modifies the ECMP Zone for the specified virtual router associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

POST virtual ecmpzones

Request Type: **POST**

Description: Creates an ECMP Zone for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones/`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

DELETE virtual ecmpzones

Request Type: **DELETE**

Description: Deletes the ECMP Zone for the specified virtual router associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

POST packettracer

Request Type: **POST**

Description: Retrieves the Packet Tracer command output for a threat defense or Cluster.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/packettracer`

Permissions: Devices > Troubleshoot > Packet Tracer > Modify Packet Tracer

POST packettracerpcap

Request Type: **POST**

Description: Retrieves the Packet Tracer using a PCAP file command output for a device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/packettracerpcap`

Permissions: Devices > Troubleshoot > Packet Capture > Modify Packet Capture

GET policybasedroutes

Request Type: **GET**

Description: Retrieves the specified Policy Based Route. If no ID is specified, retrieves a list of all Policy Based Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management

PUT policybasedroutes

Request Type: **PUT**

Description: Modifies the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST policybasedroutes

Request Type: **POST**

Description: Creates the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes`

Permissions: Devices > Device Management > Modify Devices

DELETE policybasedroutes

Request Type: **DELETE**

Description: Deletes the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET virtualpolicybasedroutes

Request Type: **GET**

Description: Retrieves the specified Policy Based Route associated for the specified virtual router. If no ID is specified, retrieves a list of all Policy Based Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management

PUT virtualpolicybasedroutes

Request Type: **PUT**

Description: Modifies the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST virtualpolicybasedroutes

Request Type: **POST**

Description: Creates the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes`

Permissions: Devices > Device Management > Modify Devices

DELETE virtualpolicybasedroutes

Request Type: **DELETE**

Description: Deletes the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET vteppolicies

Request Type: **GET**

Description: Retrieves the VTEP Policy associated with the specified NGFW device ID and policy ID. If no ID is specified, retrieves list of all VTEP Policies associated with the specified NGFW device ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management

PUT vteppolicies

Request Type: **PUT**

Description: Modifies the VTEP Policy associated with the specified NGFW device ID and policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST vteppolicies

Request Type: **POST**

Description: Creates a VTEP Policy on the specified NGFW device I.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies`

Permissions: Devices > Device Management > Modify Devices

DELETE vteppolicies

Request Type: **DELETE**

Description: Deletes the VTEP Policy associated with the specified NGFW device ID and policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management > Modify Devices

DELETE virtualswitches

Request Type: **DELETE**

Description: Deletes a virtual switch on the specified device.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

PUT virtualswitches

Request Type: **PUT**

Description: Modifies a virtual switch on the specified device.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

POST virtualswitches

Request Type: **POST**

Description: Creates a virtual switch on the specified device.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/virtualswitches`

Permissions: Devices > Device Management > Modify Device

GET virtualswitches

Request Type: **GET**

Description: Retrieves virtual switch associated with the specified NGIPS device ID and virtual switch ID. If no virtual switch ID is specified, retrieves list of all virtual switches associated with the specified NGIPS device ID.

This method is only available on a Firepower 1010 device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

GET Virtual Tunnel Interfaces

Request Type: **GET**

Description: Retrieves the virtual tunnel interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all virtual tunnel interfaces associated with the specified NGFW device ID.

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}

Permissions: Devices > VPN

Parameters available for filtering: none

PUT Virtual Tunnel Interfaces

Request Type: **PUT**

Description: modifies the virtual tunnel interface associated with the specified NGFW device ID and/or interface ID.

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}

Permissions: Devices > VPN > Modify VPN

POST Virtual Tunnel Interfaces

Request Type: **POST**

Description: Creates a virtual tunnel interface on the NGFW device.

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces

Permissions: Devices > VPN > Modify VPN

DELETE Virtual Tunnel Interfaces

Request Type: **DELETE**

Description: Deletes the virtual tunnel interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN > Modify VPN

DELETE vlaninterfaces

Request Type: **DELETE**

Description: Deletes the vlan interface associated with the specified NGFW device ID and interface ID.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces/{object_UUID}`

Permissions: Devices > VPN > Modify VPN

PUT vlaninterfaces

Request Type: **PUT**

Description: Modifies the vlan interface associated with the specified NGFW device ID and interface ID.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces/{object_UUID}`

Permissions: Devices > VPN > Modify VPN

POST vlaninterfaces

Request Type: **POST**

Description: Creates a vlan interface on the NGFW device.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces`

Permissions: Devices > VPN > Modify VPN

GET vlaninterfaces

Request Type: **GET**

Description: Retrieves the vlan interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all vlan interfaces associated with the specified NGFW device ID.

This method is only available on a Firepower 1010 device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces/{object_UUID}`

Permissions: Devices > VPN

Parameters available for filtering: name

GET vniinterfaces

Request Type: **GET**

Description: Retrieves the VNI interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves a list of all VNI interfaces on the NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management

PUT vniinterfaces

Request Type: **PUT**

Description: Modifies the VNI interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST vniinterfaces

Request Type: **POST**

Description: Creates a VNI interface on the specified NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces`

Permissions: Devices > Device Management > Modify Devices

DELETE vniinterfaces

Request Type: **DELETE**

Description: Retrieves the VNI interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

PUT physicalinterfaces

Request Type: **PUT**

Description: Modifies physical interfaces on a specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces`

Permissions: Devices > Device Management > Modify Device

GET physicalinterfaces

Request Type: **GET**

Description: Retrieves the physical interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all physical interfaces associated with the specified NGFW device ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces/{object_UUID}

Permissions: Devices > Device Management

GET bridgegroupinterfaces

Request Type: **GET**

Description: Retrieves the bridge group interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all bridge group interfaces associated with the specified NGFW device ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces/{object_UUID}

Permissions: Devices > Device Management

POST bridgegroupinterfaces

Request Type: **POST**

Description: Creates bridge group interfaces associated with the specified NGFW device ID and interface ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces

Permissions: Devices > Device Management > Modify Device

PUT bridgegroupinterfaces

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces

Permissions: Devices > Device Management > Modify Device

DELETE bridgegroupinterfaces

Request Type: **DELETE**

Description: Deletes a bridge group interface associated with the specified NGFW device ID and interface ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces

Permissions: Devices > Device Management > Modify Device

GET redundantinterfaces

Request Type: **GET**

Description: Retrieves the redundant interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all redundant interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces/{object_UUID}`

Permissions: Devices > Device Management

POST redundantinterfaces

Request Type: **POST**

Description: Creates redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management

PUT redundantinterfaces

Request Type: **PUT**

Description: Modifies redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management > Modify Device

DELETE redundantinterfaces

Request Type: **DELETE**

Description: Removes redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management

GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management

GET bgp general settings

Request Type: **GET**

Description: Retrieves BGP general settings associated with the specified device. If no device is specified, retrieves list of all BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management

PUT bgpgeneralsettings

Request Type: **PUT**

Description: Modifies the specified BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST bgpgeneralsettings

Request Type: **POST**

Description: Creates BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings`

Permissions: Devices > Device Management > Modify Devices

DELETE bgpgeneralsettings

Request Type: **DELETE**

Description: Deletes the BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET etherchannelinterfaces

Request Type: **GET**

Description: Retrieves the ethernet channel interface associated with the specified NGFW device ID and interface ID. If no ID is specified, retrieves list of all ethernet channel interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering:

POST etherchannelinterfaces

Request Type: **POST**

Description: Creates ethernet channel interfaces on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/ethernetchannelinterfaces`

Permissions: Devices > Device Management > Modify Device

PUT etherchannelinterfaces

Request Type: **PUT**

Description: Modifies an ethernet channel interfaces on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/ethernetchannelinterfaces/`

Permissions: Devices > Device Management > Modify Device

DELETE etherchannelinterfaces

Request Type: **DELETE**

Description: Removes ethernet channel interfaces from a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/ethernetchannelinterfaces`

Permissions: Devices > Device Management

GET subinterfaces

Request Type: **GET**

Description: Retrieves the sub-interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all sub-interfaces associated with the specified NGFW device ID.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

POST subinterfaces

Request Type: **POST**

Description: Creates sub interfaces on a specified device.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces
```

Permissions: Devices > Device Management

PUT subinterfaces

Request Type: **PUT**

Description: Modifies a sub interface on the specified device.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/
```

Permissions: Devices > Device Management > Modify Device

DELETE subinterfaces

Request Type: **DELETE**

Description: Deletes sub interfaces on a specified device.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces
```

Permissions: Devices > Device Management

GET fpinterfacestatistics

Request Type: **GET**

Description: Retrieves list of statistics for all interfaces associated with the specified NGIPS device ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpinterfacestatistics

Permissions: Devices > Device Management

Parameters available for filtering: name

POST interfaceevents

Request Type: **POST**

Description: Creates netmod events on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management > Modify Device

GET interfaceevents

Request Type: **GET**

Description: Retrieves list of all netmod events on the device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management

GET commands

Request Type: **GET**

Description: Retrieves the list of all command line interface commands available on the device. If a command is specified in the payload, retries the output of that command.

The below table lists the commands which can be used with the `commands` service. Some commands are only allowed with certain parameters, or specific parameters may not be allowed, as specified in the **Blocked** column.

Command	Blocked
show version	
show failover	
show dhcpd	show dhcpd binding, show dhcpd statistics
show ip	
show aaa-server	
show logging	show logging asdm, show logging queue
show snmp-server	
show running-config {any}	show running-config {no parameters}
show ssl	
show firewall	
show logging	
show network	

Command	Blocked
show ntp	
show banner	

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/commands

Permissions: Devices > Device Management

GET ftdallinterfaces

Request Type: **GET**

Description: Retrieves all types of interfaces.

URL:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/ftdallinterfaces

Permissions: Devices > Device Management

Parameters available for filtering: `filter`: This is a query parameter to fetch specific type of interfaces.

Supported Filter Criteria are :

`cclEligibleInterface`: {boolean}; `interfaceMode`: {mode}; `virtualRouterId`: {uuid}; `named`: {boolean};
`cclEligibleInterface` : Filter to get ccl eligible interface, filter value should always be true. `interfaceMode` : Filter using interface mode. Supported only for routed device. Allowed value is `ROUTED` Cannot be used with `cclEligibleInterface` filter. `virtualRouterId` : Supported only for routed device. Cannot be used with `cclEligibleInterface` filter. `named` : Supported only for routed device. Cannot be used with `cclEligibleInterface` filter.

POST changemanagers

Request Type: **POST**

Description: API to support migrating configuration management of FTD from FMC to CDO.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/operational/changemanagers

Permissions: System > Configuration

GET devicesettings

Request Type: **GET**

Description: Retrieves the Device Settings.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/devicesettings/{containerUUID}

Permissions: Devices > Device Management

PUT devicesettings

Request Type: **PUT**

Description: Modifies the Device Settings.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicesettings/{containerUUID}`

Permissions: Devices > Device Management > Modify Devices

DELETE eigroutes

Request Type: **DELETE**

Description: Deletes the specified EIGRP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET eigroutes

Request Type: **GET**

Description: Retrieves the EIGRP associated with the specified ID. If no ID is specified, retrieves list of all EIGRP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigroutes/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigroutes/{objectId}/{objectId}`

Permissions: Devices > Device Management

POST eigroutes

Request Type: **POST**

Description: Creates an EIGRP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigroutes`

Permissions: Devices > Device Management > Modify Devices

PUT eigroutes

Request Type: **PUT**

Description: Modifies the EIGRP associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

DELETE bfdpolicies

Request Type: **DELETE**

Description: Deletes the BFD Hops associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bfdpolicies/{objectId}`

Permissions: Object Manager > Modify Objects

GET bfdpolicies

Request Type: **GET**

Description: Retrieves the BFD Hops associated with the specified ID. If no ID is specified for a GET, retrieves list of all BFD Hops..

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bfdpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bfdpolicies/{object_UUID}`

Permissions: Object Manager

POST bfdpolicies

Request Type: **POST**

Description: Creates BFD Hops.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bfdpolicies`

Permissions: Object Manager > Modify Objects

PUT bfdpolicies

Request Type: **PUT**

Description: Modifies the BFD Hops associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bfdpolicies/{objectId}`

Permissions: Object Manager > Modify Objects

DELETE loopbackinterfaces

Request Type: **DELETE**

Description: Deletes the loopback interface associated with the specified NGFW device ID and/or interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/loopbackinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET loopbackinterfaces

Request Type: **GET**

Description: Retrieves the loopback interface associated with the specified NGFW device ID and/or interface ID. If no ID is specified, retrieves list of all loopback interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/loopbackinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/loopbackinterfaces/{object_UUID}`

Permissions: Devices > Device Management

POST loopbackinterfaces

Request Type: **POST**

Description: Creates a loopback interface.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/loopbackinterfaces`

Permissions: Devices > Device Management > Modify Devices

PUT loopbackinterfaces

Request Type: **PUT**

Description: Modifies the loopback interface associated with the specified NGFW device ID and/or interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/loopbackinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

Health Services

GET tunnelstatuses

Request Type: **GET**

Description: Retrieves tunnel status for S2S VPN on all managed threat defenses.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/tunnelstatuses`

Permissions: Devices > Device Management

Parameters available for filtering: `vpnTopologyId:{uuid}` which filters the tunnel statuses by S2S VPN Topology id, `deviceId:{UUID}` which filters the tunnel statuses by Device id, `status:{TUNNEL_UP|TUNNEL_DOWN|UNKNOWN}` which filters the tunnel statuses by Tunnel Status and

sortBy{:|<|>}{Topology|Device|Status|LastChange}. Filter operators : and < sorts in ascending order and > sorts in descending order.

GET tunnelsummaries

Request Type: **GET**

Description: Retrieves aggregated summary of tunnel status for S2S VPN on all managed threat defenses.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/tunnelsummaries

Permissions: Devices > Device Management

Parameters available for filtering:vpnTopologyId:{uuid} which filters the tunnel summary by S2S VPN Topology id, deviceId:{UUID} which filters the tunnel summary by Device id and groupBy groupBy:Topology|Device which groups tunnel summary by Topology or Device.,

GET Health Alerts

Request Type: **GET**

Description: Retrieves health alerts.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/alerts

Permissions: System > Health > Health Events

Parameters available for filtering: startTime, endTime, deviceUUIDs, status, moduleIDs

GET Health Metrics

Request Type: **GET**

Description: Retrieves health monitor metrics for the device.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/metrics

Permissions: System > Health > Health Events

Parameters available for filtering: deviceUUIDs, metric, startTime, endTime, step, regexFilter, queryFunction

GET ravpngateways

Request Type: **GET**

Description: Retrieves the RA VPN Gateway Details. This includes RA VPN Certificate expiry dates, maximum sessions supported.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/ravpngateways

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/health/ravpngateways/{object_UUID}

Permissions: Devices > VPN

POST terminateravpnsessions

Request Type: **POST**

Description: Terminates Remote Access VPN Sessions.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/health/ravpnsessions/operational/terminateravpnsessions`

Permissions: Devices > VPN > Modify VPN

GET csdac

Request Type: **GET**

Description: Retrieves the Cisco Secure Dynamic Attributes Connector status for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/csdac`

Permissions: System > Health > Health Policy

POST csdac

Request Type: **POST**

Description: Updates the Cisco Secure Dynamic Attributes Connector status for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/csdac`

Permissions: System > Health > Health Policy > Modify Health Policy

GET pathmonitoredinterfaces

Request Type: **GET**

Description: Retrieves the path monitored interfaces.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/pathmonitoredinterfaces`

Permissions: System > Health

Backup

.

POST devicebackup

Request Type: **POST**

Description: Creates the backup associated with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/backup/operational/devicebackup`

Permissions: System > Tools > Backup Management

GET downloadbackup

Request Type: **GET**

Description: Downloads the backup associated with the specified UUID (In case of FMC the manager identifier should be entered in place of UUID). If no filter is specified for a GET, downloads the latest backup.

URL: `/api/fmc_config/v1/domain/{domainUUID}/backup/downloadbackup/{targetId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/backup/downloadbackup/{targetId}/{object_UUID}`

Permissions: System > Tools > Backup Management

DELETE files

Request Type: **DELETE**

Description: Deletes the backup associated with the specified UUID (In case of FMC the manager identifier should be entered in place of UUID).

URL: `/api/fmc_config/v1/domain/{domainUUID}/backup/files/{targetId}`

Permissions: System > Tools > Backup Management

GET files

Request Type: **GET**

Description: Retrieves the backup associated with the specified UUID (In case of FMC the manager identifier should be entered in place of UUID). If no filter is specified for a GET, retrieves the latest backup.

URL: `/api/fmc_config/v1/domain/{domainUUID}/backup/files`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/backup/files/{object_UUID}`

Permissions: System > Tools > Backup Management

Chassis

GET fmcmanagedchassis

Request Type: **GET**

Description: Retrieves information on the specified chassis managed device. If no ID is given, retrieves list of all chassis managed devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{objectId}`

Permissions: Devices > Device Management

GET networkmodules

Request Type: **GET**

Description: Retrieves the information about the network module object associated with the ID. If no ID is specified, retrieves list of all network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management

PUT networkmodules

Request Type: **PUT**

Description: Modifies the specified network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management > Modify Devices

PUT syncnetworkmodule

Request Type: **PUT**

Description: Retrieve Network module data from FXOS and updates.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/syncnetworkmodule`

Permissions: Devices > Device Management > Modify Devices

GET chassisinterfaces

Request Type: **GET**

Description: Retrieves the chassis interfaces associated with the ID. If no ID is specified, retrieves list of all chassis interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces/{interfaceUUID}`

Permissions: Devices > Device Management

GET networkmodules

Request Type: **GET**

Description: Retrieves the information about the network module object associated with the ID. If no ID is specified, retrieves list of all network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management

POST breakoutinterfaces

Request Type: **POST**

Description: Break interface.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/breakoutinterfaces`

Permissions: Devices > Device Management > Modify Devices

GET evaluateoperation

Request Type: **GET**

Description: Validate interface usage.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces/{interfaceUUID}/evaluateoperation`

Permissions: Devices > Device Management

POST joininterfaces

Request Type: **POST**

Description: Join interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/joininterfaces`

Permissions: Devices > Device Management > Modify Devices

GET physicalinterfaces

Request Type: **GET**

Description: Retrieves the chassis physical interface associated with the ID. If no ID is specified, retrieves list of all chassis physical interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/physicalinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/physicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management

PUT physicalinterfaces

Request Type: **PUT**

Description: Modifies the chassis physical interface associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/physicalinterfaces/{interfaceUUID}`

Permissions: Devices > Device Management > Modify Devices

Intelligence Services

POST collections

Request Type: **POST**

Description: Adds a collections from a TAXII source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/collections`

Permissions: Intelligence

POST discoveryinfo

Request Type: **POST**

Description: Adds information about TAXII collections available from a source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/discoveryinfo`

Permissions: Intelligence

GET element

Request Type: **GET**

Description: Retrieves the intelligence-enabled sensor associated with the specified ID. If no ID is specified, retrieves list of all intelligence-enabled sensors.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element/{object_UUID}`

Permissions: Intelligence

DELETE incident

Request Type: **DELETE**

Description: Deletes an incident.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/incident/{object_UUID}`

Permissions: Intelligence

PUT incident

Request Type: **PUT**

Description: Modifies an intelligence incident with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

GET incident

Request Type: **GET**

Description: Retrieves the intelligence incident associated with the specified ID. If no ID is specified, retrieves list of all intelligence incidents. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

PUT indicator

Request Type: **PUT**

Description: Modifies an indicator with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

GET indicator

Request Type: **GET**

Description: Retrieves the indicator associated with the specified ID. If no ID is specified, retrieves list of all indicators. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

PUT observable

Request Type: **PUT**

Description: Modifies an observable with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

GET observable

Request Type: **GET**

Description: Retrieves the observable associated with the specified ID. If no ID is specified, retrieves list of all observables. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

PUT settings

Request Type: **PUT**

Description: Activates or deactivates an intelligence setting.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

GET settings

Request Type: **GET**

Description: Retrieves the on/off settings for the specified value. If no ID is specified, retrieves list of all TID settings.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings`

URL for GET by value: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

DELETE source

Request Type: **DELETE**

Description: Deletes an intelligence source from the device.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/source/{object_UUID}`

Permissions: Intelligence

PUT source

Request Type: **PUT**

Description: Modifies an intelligence source with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

POST source

Request Type: **POST**

Description: Adds a source for intelligence information.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

Permissions: Intelligence

GET source

Request Type: **GET**

Description: Retrieves the intelligence source associated with the specified ID. If no ID is specified, retrieves list of all intelligence sources. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

License

.

GET smartlicenses

Request Type: **GET**

Description: Retrieves the retrieving assigned device licenses associated with the ID. If no ID is specified, retrieves list of all assigned device licenses.

URL: `/api/fmc_platform/v1/license/smartlicenses`

URL for GET by ID: `/api/fmc_platform/v1/license/smartlicenses/{object_UUID}`

Permissions: System > Licenses > Smart Licenses

POST smartlicenses

Request Type: **POST**

Description: Updates device licenses.

URL: `/api/fmc_platform/v1/license/smartlicenses`

Permissions: System > Licenses > Smart Licenses

GET devicelicense

Request Type: **GET**

Description: Retrieves the Device Licenses.

URL: `/api/fmc_platform/v1/license/devicelicense/{objectId}`

Permissions: Devices > Device Management

PUT devicelicense

Request Type: **PUT**

Description: Modifies the Device Licenses.

URL: `/api/fmc_platform/v1/license/devicelicenses/{objectId}`

Permissions: Devices > Device Management > Modify Devices

Search

GET globalsearch

Request Type: **GET**

Description: Search for objects and policies matching specified text or IP address.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/globalsearch`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

GET objectsearch

Request Type: **GET**

Description: Search for objects matching specified text or IP address.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/object`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

GET policysearch

Request Type: **GET**

Description: Search for policies matching specified text or IP address (literal values in policies).

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/policy`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

GET device

Request Type: **GET**

Description: Search for devices matching specified text.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/device`

Permissions: Devices

Integration Services

PUT cloudeventsconfigs

Request Type: **PUT**

Description: Modifies the cloud event configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET cloudeventsconfigs

Request Type: **GET**

Description: Retrieves the cloud event configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all cloud event configuration objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager

PUT cloudregions

Request Type: **PUT**

Description: Modifies the cloud region configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

GET cloudregions

Request Type: **GET**

Description: Retrieves the cloud region configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all cloud regions.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

DELETE externallookups

DELETE externallookups

Description: Deletes the external lookup objects with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

PUT externallookups

Request Type: **PUT**

Description: Modifies externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

POST externallookups

POST externallookups

Description: Creates externallookups objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

Permissions: Object Manager>Modify Object Manager

GET externallookups

GET externallookups

Retrieves the externallookups object associated with the specified ID. If no ID, retrieves list of all externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

DELETE packetanalyzerdevices

Request Type: **DELETE**

Description: Deletes the packet analyzer object with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

PUT packetanalyzerdevices

Request Type: **PUT**

Description: Modifies the packet analyzer object with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

POST packetanalyzerdevices

Request Type: **POST**

Description: Creates PKI enrollments objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/packetanalyzerdevices`

Permissions: Object Manager

GET packetanalyzerdevices

Request Type: **GET**

Description: Retrieves the packetanalyzerdevices object associated with the specified ID. If no ID, retrieves list of all packetanalyzerdevices objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

GET External Storage

Request Type: **GET**

Description: Retrieves the external event storage configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all external event storage configurations.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}`

Permissions: System > Integration

Parameters available for filtering: None

PUT External Storage

Request Type: **PUT**

Description: Modifies the external event storage configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}`

Permissions: System > Integration

GET FMC HA Statuses

Request Type: **GET**

Description: Retrieves management center HA Statuses.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/fmchastatuses`

Permissions: System>Integration>High Availability

GET dynamicattributesfeeds

Request Type: **GET**

Description: Retrieves Dynamic Attributes Feeds.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/dynamicattributesfeeds`

Permissions: Devices > VPN

PUT dynamicattributesfeeds

Request Type: **PUT**

Description: Updates Dynamic Attributes Feeds.t.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/dynamicattributesfeeds`

Permissions: Devices > VPN > Modify VPN

GET SecureX Configs

Request Type: **GET**

Description: Retrieves the SecureX configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all SecureX configurations.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}`

Permissions: System>SecureX

PUT SecureX Configs

Request Type: **PUT**

Description: Modifies the SecureX configuration associated with the specified ID

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}`

Permissions: System>SecureX

GET ebssnapshot

Request Type: **GET**

Description: Retrieves the EBS snapshot. associated with the specified ID. If no ID is specified, retrieves list of all EBS snapshots.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot/{objectId}/{object_UUID}`

Permissions: Integration > Other Integrations

POST ebssnapshot

Request Type: **POST**

Description: Creates an EBS snapshot..

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot`

Permissions: Integration > Other Integrations

POST testumbrellaconnections

Request Type: **POST**

Description: Tests connection to the umbrella cloud.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/operational/testumbrellaconnections`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET umbrellaconnections

Request Type: **GET**

Description: Retrieves the Umbrella connection configuration associated with the specified ID. If no ID is specified, retrieves a list of all Umbrella connections.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections/{objectId}/{object_UUID}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

PUT umbrellaconnections

Request Type: **PUT**

Description: Modifies the specified Umbrella connections configuration.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections/{objectId}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET tunneldeployments

Request Type: **GET**

Description: Retrieves Tunnel deployment data on Umbrella.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments/{objectId}`

Permissions: Devices > VPN

POST tunneldeployments

Request Type: **POST**

Description: Creates a tunnel deployment.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments`

Permissions: Devices > VPN > Modify VPN

GET tunneltranscripts

Request Type: **GET**

Description: Retrieves Transcript for Umbrella deployment for a given device and topology..

URL:

`/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments/{containerUUID}/transcripts/{objectId}`

Permissions: Devices > VPN

GET datacenters

Request Type: **GET**

Description: Retrieves list of all the Umbrella data centers.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/datacenters`

Permissions: Integration > Security Analytics & Logging

GET transcripts

Request Type: **GET**

Description: Retrieves Transcript for Umbrella deployment for a given device and topology.

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/umbrella/tunneldeployments/{containerUUID}/transcripts/{objectId}/{object_UUID}`

Permissions: Integration > Security Analytics & Logging

Object Services

GET AnyConnect Custom Attributes

Request Type: **GET**

Description: Retrieves the AnyConnect Custom Attribute associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Custom Attribute objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{containerUUID}/override`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value

PUT AnyConnect Custom Attributes

Request Type: **PUT**

Description: Modifies the AnyConnect Custom Attribute associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST AnyConnect Custom Attributes

Request Type: **POST**

Description: Creates an AnyConnect Custom Attribute.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes`

Permissions: Object Manager > Modify Object Manager

DELETE AnyConnect Custom Attributes

Request Type: **DELETE**

Description: Deletes the AnyConnect Custom Attribute associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET AnyConnect Packages

Request Type: **GET**

Description: Retrieves the AnyConnect Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Package objects..

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager

DELETE anyconnectpackages

Request Type: **DELETE**

Description: Deletes the AnyConnect Package associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST anyconnectpackages

Request Type: **POST**

Description: Creates an anyconnectpackages object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages`

Permissions: Object Manager > Modify Object Manager

PUT anyconnectpackages

Request Type: **PUT**

Description: Modifies the AnyConnect Package associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET anyconnectexternalbrowserpackages

Request Type: **GET**

Description: Retrieves the AnyConnect External Browser Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect External Browser Package objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE anyconnectexternalbrowserpackages

Request Type: **DELETE**

Description: Deletes the AnyConnect External Browser Package associated with the specified ID.

URL:

/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}

Permissions: Object Manager > Modify Object Manager

POST anyconnectexternalbrowserpackages

Request Type: **POST**

Description: Creates an AnyConnect External Browser Package.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages

Permissions: Object Manager > Modify Object Manager

PUT anyconnectexternalbrowserpackages

Request Type: **PUT**

Description: Modifies the AnyConnect External Browser Package associated with the specified ID.

URL:

/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}

Permissions: Object Manager > Modify Object Manager

GET AnyConnect Profiles

Request Type: **GET**

Description: Retrieves the AnyConnect Profile associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Profile objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}

Permissions: Object Manager

Parameters available for filter: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

Parameters available for filter: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE anyconnectprofiles

Request Type: **DELETE**

Description: Deletes the AnyConnect Profile associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST anyconnectprofiles

Request Type: **POST**

Description: Creates an AnyConnect Profile.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles`

Permissions: Object Manager > Modify Object Manager

PUT anyconnectprofiles

Request Type: **PUT**

Description: Modifies the AnyConnect Profile associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET anyprotocolportobjects

Request Type: **GET**

Description: Retrieves the any protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects with the protocol set to All.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/anyprotocolportobjects`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/anyprotocolportobjects/{object_UUID}`

Permissions: Object Manager

GET applicationcategories

Request Type: **GET**

Description: Retrieves the application category object associated with the specified ID. If no ID is specified, retrieves list of all application category objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationcategories`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationcategories/{object_UUID}`

Permissions: Object Manager

GET applicationfilters

Request Type: **GET**

Description: Retrieves the application filter object associated with the specified ID. If no ID is specified, retrieves list of all application filter objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationfilters`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationfilters/{object_UUID}`

Permissions: Object Manager

PUT applicationfilters

Request Type: **PUT**

Description: Modifies the application filter object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}`

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

POST applicationfilters

Request Type: **POST**

Description: Creates or overrides the application filter object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/applicationfilters`

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

DELETE applicationfilters

Request Type: **DELETE**

Description: Deletes the application filter object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}`

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

GET applicationproductivities

Request Type: **GET**

Description: Retrieves the application productivity object associated with the specified ID. If no ID is specified, retrieves list of all application productivity objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationproductivities`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationproductivities/{object_UUID}`

Permissions: Object Manager

GET applicationrisks

Request Type: **GET**

Description: Retrieves the application risk object associated with the specified ID. If no ID is specified, retrieves list of all application risk objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationrisks`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationrisks/{object_UUID}`

Permissions: Object Manager

GET applications

Request Type: **GET**

Description: Retrieves the application object associated with the specified ID. If no ID is specified, retrieves list of all application objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applications`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/applications/{object_UUID}`

Permissions: Object Manager

GET applicationtags

Request Type: **GET**

Description: Retrieves the application tag object associated with the specified ID. If no ID is specified, retrieves list of all application tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtags`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtags/{object_UUID}`

Permissions: Object Manager

GET applicationtypes

Request Type: **GET**

Description: Retrieves the application type object associated with the specified ID. If no ID is specified, retrieves list of all application type objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtypes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtypes/{object_UUID}`

Permissions: Object Manager

GET aspathlists

Request Type: **GET**

Description: Retrieves the autonomous system path list associated with the specified ID. If no ID is specified, retrieves list of all autonomous system paths.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}

Permissions: Object Manager

PUT aspathlists

Request Type: **PUT**

Description: Modifies the AsPath List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}

Permissions: Object Manager > Modify Object Manager

POST aspathlists

Request Type: **POST**

Description: Creates an AsPath List object.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists

Permissions: Object Manager > Modify Object Manager

DELETE aspathlists

Request Type: **DELETE**

Description: Deletes the AsPath List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}

Permissions: Object Manager > Modify Object Manager

DELETE bfdtemplates

Request Type: **DELETE**

Description: Deletes the specified bi-directional forwarding template.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/bfdtemplates/{objectId}

Permissions: Object Manager > Modify Objects

GET bfdtemplates

Request Type: **GET**

Description: Retrieves the bi-directional forwarding template associated with the ID. If no ID is specified, retrieves list of all bi-directional forwarding templates.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/bfdtemplates

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/bfdtemplates/{object_UUID}`

Permissions: Object Manager

POST bfdtemplates

Request Type: **POST**

Description: Creates a bi-directional forwarding template..

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/bfdtemplates`

Permissions: Object Manager > Modify Objects

PUT bfdtemplates

Request Type: **PUT**

Description: Modifies the specified bi-directional forwarding template.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/bfdtemplates/{objectId}`

Permissions: Object Manager > Modify Objects

POST bulkdynamicobjects

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/bulkdynamicobjects`

Permissions: Devices > VPN > Modify VPN

GET certenrollments

Request Type: **GET**

Description: Retrieves the PKI enrollments object associated with the specified ID. If no ID is specified for a GET, retrieves list of all PKI enrollment objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/certenrollments`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/certenrollments/{parent_object_UUID}`

Permissions: Devices > Device Management > View Devices

DELETE certenrollments

Request Type: **DELETE**

Description: Deletes the Certificate Enrollment associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certenrollments/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST certenrollments

Request Type: **POST**

Description: Creates a the Certificate Enrollment.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certenrollments`

Permissions: Devices > VPN > Modify VPN

PUT certenrollments

Request Type: **PUT**

Description: Modifies the Certificate Enrollment associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certenrollments/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET communitylists

Request Type: **GET**

Description: Retrieves the community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/communitylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/communitylists/{objectId}`

Permissions: Object Manager

GET Certificate Maps

Request Type: **GET**

Description: Retrieves the Certificate Map associated with the specified ID. If no ID is specified for a GET, retrieves list of all Certificate Map objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > Certificates

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

DELETE certificatemaps

Request Type: **DELETE**

Description: Deletes the Certificate Map associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST certificatemaps

Request Type: **POST**

Description: Creates a Certificate Map.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps`

Permissions: Devices > VPN > Modify VPN

PUT certificatemaps

Request Type: **PUT**

Description: Modifies the Certificate Map associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET continents

Request Type: **GET**

Description: Retrieves the continent object associated with the specified ID. If no ID is specified, retrieves list of all continent objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/continents`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/continents/{object_UUID}`

Permissions: Object Manager

GET countries

Request Type: **GET**

Description: Retrieves the country object associated with the specified ID. If no ID is specified, retrieves list of all country objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/countries`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/countries/{object_UUID}`

Permissions: Object Manager

DELETE dhcpipv6pools

Request Type: **DELETE**

Description: Deletes the DHCP IPv6 pool object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dhcpipv6pools/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET dhcpipv6pools

Request Type: **GET**

Description: Retrieves the DHCP IPv6 pool object associated with the specified ID. If no ID is specified, retrieves list of all DHCP IPv6 Pool objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dhcpipv6pools`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/dhcpipv6pools/{object_UUID}`

Permissions: Object Manager

POST dhcpipv6pools

Request Type: **POST**

Description: Creates a DHCP IPv6 pool object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dhcpipv6pools`

Permissions: Object Manager > Modify Object Manager

PUT dhcpipv6pools

Request Type: **PUT**

Description: Modifies the DHCP IPv6 pool object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dhcpipv6pools/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE dnsservergroups

Request Type: **DELETE**

Description: Deletes a DNS server group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT dnsservergroups

Request Type: **PUT**

Description: Modifies a DNS server group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

Permissions: Devices > Device Management > Modify Devices

POST dnsservergroups

Request Type: **POST**

Description: Creates a DNS server group group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

Permissions: Devices > Device Management > Modify Devices

GET dnsservergroups

Request Type: **GET**

Description: Retrieves the DNS server group associated with the specified ID. If no ID is specified, retrieves list of all dns server groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups/{object_UUID}`

Description: Retrieves all(Domain and Device) overrides on a ICMPV4 object. Response will always be in expanded form. If passed, the "expanded" query parameter will be ignored.

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides/{objectId}`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides`

Permissions: Devices > Device Management > View Devices

POST downloadinternalca

Request Type: **POST**

Description: Retrieves and downloads the Internal Certificate Authority object in a PKCS12 file encrypted using the provided password.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/downloadinternalca`

Permissions: Devices > Certificates > Modify Certificates

POST dynamicobjectmappings

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings`

Permissions: Object Manager > Modify Object Manager

DELETE dynamicobjectmappings

Request Type: **DELETE**

Description: Removes Dynamic Object Mappings for specific Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings`

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"
Agent ID:	"agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

GET dynamicobjects

Request Type: **GET**

Description: Retrieves the Dynamic Object associated with the specified ID. If no ID is specified for a GET, retrieves list of all Dynamic Objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Permissions: Object Manager

Parameters available for filtering: name (Cannot be used if object ID is specified in path.)

POST dynamicobjects

Request Type: **POST**

Description: Creates or overrides the Dynamic Objects with the specified parameters.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects

Permissions: Object Manager > Modify Object Manager

DELETE dynamicobjects

Request Type: **DELETE**

Description: Deletes the Dynamic Object associated with the specified ID. If used without an ID, deletes objects selected by filtering.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/

URL for DELETE by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"

Parameter	Values
Name starts with:	"nameStartsWith:{name-pattern}"

Permissions: Object Manager > Modify Object Manager

PUT dynamicobjects

Request Type: **PUT**

Description: Modifies the Dynamic Object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}

Permissions: Object Manager > Modify Object Manager

GET mappings

Request Type: **GET**

Description: Retrieves the Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}/mappings

Permissions: Object Manager

PUT mappings

Request Type: **PUT**

Description: Adds Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings

Permissions: Object Manager > Modify Object Manager

DELETE mappings

Request Type: **DELETE**

Description: Removes the Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"
Agent ID:	"agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

GET endpointdevicetypes

Request Type: **GET**

Description: Retrieves the endpoint device type object associated with the specified ID. If no ID is specified, retrieves list of all endpoint device type objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/endpointdevicetypes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/endpointdevicetypes/{object_UUID}`

Permissions: Object Manager

GET expanded community lists

Request Type: **GET**

Description: Retrieves the expanded community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}`

Permissions: Object Manager

PUT expandedcommunitylists

Request Type: **PUT**

Description: Modifies the specified expanded community list.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST expandedcommunitylists

Request Type: **POST**

Description: Creates an expanded community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists`

Permissions: Object Manager > Modify Object Manager

DELETE expandedcommunitylists

Request Type: **DELETE**

Description: Deletes the specified expanded community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET extended access lists

Request Type: **GET**

Description: Retrieves extended access list associated with the specified ID. If no ID is specified, retrieves list of all extended access lists.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/extendedaccesslists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/extendedaccesslists/{object_UUID}`

Permissions: Devices > Device Management > View Devices

PUT extendedaccesslists

Request Type: **PUT**

Description: Modifies the extended access list associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedaccesslists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST extendedaccesslists

Request Type: **POST**

Description: Creates an extended access lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedaccesslists`

Permissions: Object Manager > Modify Object Manager

DELETE extendedaccesslists

Request Type: **DELETE**

Description: Deletes the extended access list associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedaccesslists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET extendedcommunitylists

Request Type: **GET**

Description: Retrieves the extended community list associated with the specified ID. If no ID is specified, retrieves list of all extended community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}`

URL for GET overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{containerUUID}/overrides`

URL for GET overrides by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{containerUUID}/overrides/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value and `"type:{type}"` to search for specific type of the object. For ExtendedCommunityLists supported types are Standard and Expanded.

PUT extendedcommunitylists

Request Type: **PUT**

Description: Modifies the extended community list with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST extendedcommunitylists

Request Type: **POST**

Description: Creates an extended community list.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists`

Permissions: Object Manager > Modify Object Manager

DELETE extendedcommunitylists

Request Type: **DELETE**

Description: Deletes extended community list with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE fqdns

Request Type: **DELETE**

Description: Deletes the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT fqdns

Request Type: **PUT**

Description: Modifies the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST fqdns

Request Type: **POST**

Description: Creates or overrides the FQDN objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET fqdns

Request Type: **GET**

Description: Retrieves the FQDN object associated with the specified ID. If no ID is specified for a GET, retrieves list of all FQDN objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{fqdn_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET geolocation

Request Type: **GET**

Description: Retrieves the geolocation object associated with the specified ID. If no ID is specified, retrieves list of all geolocation objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations/{object_UUID}`

Permissions: Object Manager

PUT geolocations

Request Type: **PUT**

Description: Modifies the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST geolocations

Request Type: **POST**

Description: Creates or overrides the Geolocation objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations`

Permissions: Object Manager > Modify Object Manager

DELETE geolocations

Request Type: **DELETE**

Description: Deletes the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET global time zones

Request Type: **GET**

Description: Retrieves the global time zone object associated with the specified ID. If no ID is specified, retrieves list of all global time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones/{objectId}`

Permissions: Object Manager

GET grouppolicies

Request Type: **GET**

Description: Retrieves the VPN group policies associated with the specified ID. If no ID is specified for a GET, retrieves list of all VPN group policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies/{objectId}`

Permissions: Devices > VPN

DELETE groupolicies

Request Type: **DELETE**

Description: Deletes the VPN group policies associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/groupolicies/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST groupolicies

Request Type: **POST**

Description: Creates a VPN group policy

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/groupolicies`

Permissions: Devices > VPN > Modify VPN

PUT groupolicies

Request Type: **PUT**

Description: Modifies the VPN group policies associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/groupolicies/{objectId}`

Permissions: Devices > VPN > Modify VPN

DELETE hosts

Request Type: **DELETE**

Description: Deletes the specified host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT hosts

Request Type: **PUT**

Description: Modifies a host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST hosts

Request Type: **POST**

Description: Creates or overrides the host objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET hosts

Request Type: **GET**

Description: Retrieves the host object associated with the specified ID. If no ID is specified, retrieves list of all host objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET hostscanpackages

Request Type: **GET**

Description: Retrieves HostScan packages. If no ID is specified for a GET, retrieves list of all HostScan packages.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices

DELETE hostscanpackages

Request Type: **DELETE**

Description: Deletes the HostScan package with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST hostscanpackages

Request Type: **POST**

Description: Creates a HostScan package.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages`

Permissions: Devices > Device Management > Modify Devices

PUT hostscanpackages

Request Type: **PUT**

Description: Modifies the HostScan package with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices > Device Management > Modify Devices

DELETE icmpv4objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv4 port.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT icmpv4objects

Request Type: **PUT**

Description: Modifies ICMPv4 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST icmpv4objects

Request Type: **POST**

Description: Creates or overrides the ICMPv4 port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET icmpv4objects

Request Type: **GET**

Description: Retrieves the ICMPv4 object associated with the specified ID. If no ID, retrieves list of all ICMPv4 objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp4objects?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp4objects/{icmpv4object_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp4objects/{icmp4object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE icmpv6objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv6 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT icmpv6objects

Request Type: **PUT**

Description: Modifies ICMPv6 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST icmpv6objects

Request Type: **POST**

Description: Creates or overrides the ICMPv6 port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET icmpv6objects

Request Type: **GET**

Description: Retrieves the ICMPv6 object associated with the specified ID. If no ID is specified, retrieves list of all ICMPv6 objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp6objects?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp6objects/{icmpv6object_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp6objects/{icmp6object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE ikev1ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv1 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT ikev1ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv1 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ikev1ipsecproposals

Request Type: **POST**

Description: Creates the IKEv1 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals`

Permissions: Object Manager > Modify Object Manager

GET ikev1ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv1 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 IPsec Proposal objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1ipseccproposals

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipseccproposals/{ikev1ipseccproposal_UUID}

Permissions: Object Manager

DELETE ikev1policies

Request Type: **DELETE**

Description: Deletes the IKEv1 policy object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}

Permissions: Object Manager > Modify Object Manager

PUT ikev1policies

Request Type: **PUT**

Description: Modifies the IKEv1 policy object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}

Permissions: Object Manager > Modify Object Manager

POST ikev1policies

Request Type: **POST**

Description: Creates the IKEv1 policy object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies

Permissions: Object Manager > Modify Object Manager

GET ikev1policies

Request Type: **GET**

Description: Retrieves the IKEv1 policy object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 policy objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1policies

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}

Permissions: Object Manager

DELETE ikev2ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT ikev2ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ikev2ipsecproposals

Request Type: **POST**

Description: Creates the IKEv2 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals`

Permissions: Object Manager > Modify Object Manager

GET ikev2ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv2 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev2ipsecproposals`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager

DELETE ikev2policies

Request Type: **DELETE**

Description: Deletes the IKEv2 object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT ikev2policies

Request Type: **PUT**

Description: Modifies the IKEv2 object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ikev2policies

Request Type: **POST**

Description: Creates the IKEv2 object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies`

Permissions: Object Manager > Modify Object Manager

GET ikev2policies

Request Type: **GET**

Description: Retrieves the IKEv2 object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev2policies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}`

Permissions: Object Manager

DELETE interfacegroups

Request Type: **DELETE**

Description: Deletes the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT interfacegroups

Request Type: **PUT**

Description: Modifies the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST interfacegroups

Request Type: **POST**

Description: Creates or overrides the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET interfacegroups

Request Type: **GET**

Description: Retrieves the Interface group objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all interface group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET interfaceobjects

Request Type: **GET**

Description: Retrieves list of all the interface objects both security zones and interface groups.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{object_UUID}`

URL to list all overrides on a particular object::

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE internalcas

Request Type: **DELETE**

Description: Deletes the Internal CA associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/internalcas/{objectId}`

Permissions: Devices > Certificates > Modify Certificates

GET internalcas

Request Type: **GET**

Description: Retrieves the Internal CA associated with the specified ID. If no ID is specified, retrieves list of all Internal CAs.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/internalcas`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/internalcas/{object_UUID}`

Permissions: Devices > Certificates

POST internalcas

Request Type: **POST**

Description: Creates an Internal CA.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/internalcas`

Permissions: Devices > Certificates > Modify Certificates

PUT internalcas

Request Type: **PUT**

Description: Modifies the Internal CA associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/internalcas/{objectId}`

Permissions: Devices > Certificates > Modify Certificates

DELETE internalcertificates

Request Type: **DELETE**

Description: Deletes the Internal Certificate associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/internalcertificates/{objectId}`

Permissions: Devices > Certificates > Modify Certificates

GET internalcertificates

Request Type: **GET**

Description: Retrieves the Internal Certificate associated with the specified ID. If no ID is specified, retrieves list of all Internal Certificates.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/internalcertificates

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/internalcertificates/{object_UUID}

Permissions: Devices > Certificates

POST internalcertificates

Request Type: **POST**

Description: Creates an Internal Certificate.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/internalcertificates

Permissions: Devices > Certificates > Modify Certificates

PUT internalcertificates

Request Type: **PUT**

Description: Modifies the Internal Certificate associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/internalcertificates/{objectId}

Permissions: Devices > Certificates > Modify Certificates

GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=name:Browser OR filter=name:Browser/Firefox OR filter=showonlyparents:true OR filter=showonlyparents:false OR filter=issystemdefined:true OR issystemdefined:false.

PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the Snort3 Intrusion rule group with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST Intrusion Rule Groups

Request Type: **POST**

Description: Creates or overrides the Snort3 Intrusion rule group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

DELETE Intrusion Rule Groups

Request Type: **DELETE**

Description: Deletes the specified Snort3 intrusion rule group.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET intrusionrules

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): `filter=gid:123` OR `filter=sid:123` OR `filter=gid:123;sid:456` OR `filter=overrides:true` OR `filter=overrides:true;ipspolicy:UUID1,UUID2,UUID3` OR `filter=fts:123`. `ipspolicy` is comma separated Snort3 Intrusion Policy UUID.

PUT intrusionrules

Request Type: **PUT**

Description: Creates or modifies the Snort3 rule with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules`

URL for PUT by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST intrusionrules

Request Type: **POST**

Description: Creates or overrides the Snort3 rules with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

DELETE intrusionrules

Request Type: **DELETE**

Description: Deletes the specified Snort3 rule.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET ipv4addresspools

Request Type: **GET**

Description: Retrieves the IPv4 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv4 Address Pool objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools`

URL for overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE ipv4addresspools

Request Type: **DELETE**

Description: Deletes the IPv4 Address Pool object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST ipv4addresspools

Request Type: **POST**

Description: Creates an IPv4 Address Pool object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools`

Permissions: Object Manager > Modify Object Manager

PUT ipv4addresspools

Request Type: **PUT**

Description: Modifies the IPv4 Address Pool object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET ipv6addresspools

Request Type: **GET**

Description: Retrieves the IPv6 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv6 Address Pool objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools`

URL for overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE ipv6addresspools

Request Type: **DELETE**

Description: Deletes the IPv6 Address Pool object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST ipv6addresspools

Request Type: **POST**

Description: Creates an IPv6 Address Pool object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools`

Permissions: Object Manager > Modify Object Manager

PUT ipv6addresspools

Request Type: **PUT**

Description: Modifies the IPv6 Address Pool object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET ipv4prefixlists

Request Type: **GET**

Description: Retrieves the IPv4 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv4 prefix lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}`

Permissions: Object Manager

PUT ipv4prefixlists

Request Type: **PUT**

Description: Modifies the IPv4 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST ipv4prefixlists

Request Type: **POST**

Description: Creates an IPv4 Prefix List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists`

Permissions: Object Manager > Modify Object Manager

DELETE ipv4prefixlists

Request Type: **DELETE**

Description: Deletes the IPv4 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET ipv6prefixlists

Request Type: **GET**

Description: Retrieves the IPv6 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv6 prefix lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}`

Permissions: Object Manager

PUT ipv6prefixlists

Request Type: **PUT**

Description: Modifies the IPv6 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST ipv6prefixlists

Request Type: **POST**

Description: Creates an IPv6 Prefix List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists`

Permissions: Object Manager > Modify Object Manager

DELETE ipv6prefixlists

Request Type: **DELETE**

Description: Deletes the IPv6 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET isesecuritygrouptags

Request Type: **GET**

Description: Retrieves the ISE security group tag object with the specified ID. If no ID is specified, retrieves list of all ISE security group tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/isesecuritygrouptags`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/isesecuritygrouptags/{object_UUID}`

Permissions: Object Manager

GET keychain

Request Type: **GET**

Description: Retrieves the keychain object associated with the specified ID. If no ID is specified for a GET, retrieves list of all keychain objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to list all overrides on a particular object. If the object ID is not specified, displays all keychain objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychains_UUID}/overrides/{objectId}`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?overrideTargetId={target_UUID}`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}`



Note The target UUID could be that of a domain or a device.

Permissions: Object Manager

DELETE keychain

Request Type: **DELETE**

Description: Deletes the keychain object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}`



Note The target UUID could be that of a domain or a device.

Permissions: Object Manager > Modify Object Manager

PUT keychain

Request Type: **PUT**

Description: Modifies the keychain object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

Permissions: Object Manager > Modify Object Manager

POST keychain

Request Type: **POST**

Description: Creates or overrides the keychain objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`

URL for Bulk Post:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?bulk=true`

URL to create an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`



Attention If override was not set when creating the key chain object:

1. Using PUT, update the override property of the key chain object to "true".
 2. Create the POST override for the key chain object.
-

Permissions: Object Manager > Modify Object Manager

GET localrealmusers

Request Type: **GET**

Description: Retrieves the local realm user object associated with the specified ID. If no ID is specified, retrieves list of all local realm user objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: System > Integration > Realms

Parameters available for filtering: To filter users by realm, use `realm: {realmUUID}`. To filter users by name, use `name: {name}`

PUT localrealmusers

Request Type: **PUT**

Description: Modifies the local realm user object with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

POST localrealmusers

Request Type: **POST**

Description: Creates or overrides the local realm user objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers`

Permissions: System > Integration > Realms > Modify Realms

POST localrealmusers

Request Type: **DELETE**

Description: Deletes the specified local realm user object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET networkaddresses

Request Type: **GET**

Description: Retrieves list of all network and host objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

DELETE networkgroups

Request Type: **DELETE**

Description: Deletes the specified Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT networkgroups

Request Type: **PUT**

Description: Modifies a Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST networkgroups

Request Type: **POST**

Description: Creates or overrides the network group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET networkgroups

Request Type: **GET**

Description: Retrieves the network group object associated with the specified ID. If no ID is specified, retrieves list of all network group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE networks

Request Type: **DELETE**

Description: Deletes the specified network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT networks

Request Type: **PUT**

Description: Modifies network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST networks

Request Type: **POST**

Description: Creates or overrides the network objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET networks

Request Type: **GET**

Description: Retrieves the network objects associated with the specified ID. If no ID is specified, retrieves list of all network objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET packettracerpcaplist

Request Type: **GET**

Description: Retrieves all the PCAP files in the most recently uploaded fashion.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/packettracerpcaplist`

Permissions: Devices > Troubleshoot > Packet Capture

POST packettracerpcapupload

Request Type: **POST**

Description: Imports a PCAP file from Packet Tracer.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/packettracerpcapupload`

Permissions: Devices > Troubleshoot > Packet Capture > Modify Packet Capture

GET policy lists

Request Type: **GET**

Description: Retrieves the policy list associated with the specified ID. If no ID is specified, retrieves all policy lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager

PUT policylists

Request Type: **PUT**

Description: Modifies the Policy List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager > Modify Objects

POST policylists

Request Type: **POST**

Description: Creates a Policy List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

Permissions: Object Manager > Modify Objects

DELETE policylists

Request Type: **DELETE**

Description: Deletes the Policy List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager > Modify Objects

DELETE portobjectgroups

Request Type: **DELETE**

Description: Deletes the specified port object groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT portobjectgroups

Request Type: **PUT**

Description: Modifies port object groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST portobjectgroups

Request Type: **POST**

Description: Creates or overrides the port object groups with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET portobjectgroups

Request Type: **GET**

Description: Retrieves the port object group object associated with the specified ID. If no ID is specified, retrieves list of all port object group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

GET ports

Request Type: **GET**

Description: Retrieves list of all port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ports`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

DELETE protocolportobjects

Request Type: **DELETE**

Description: Deletes the specified protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT protocolportobjects

Request Type: **PUT**

Description: Modifies protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST protocolportobjects

Request Type: **POST**

Description: Creates or overrides the protocol port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET protocolportobjects

Request Type: **GET**

Description: Retrieves the protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET radiusservergroups

Request Type: **GET**

Description: Retrieves the Radius Server Group associated with the specified ID. If no ID is specified for a GET, retrieves list of all Radius Server Group objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE radiusservergroups

Request Type: **DELETE**

Description: Deletes the Radius Server Group associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}

Permissions: Object Manager > Modify Object Manager

POST radiusservergroups

Request Type: **POST**

Description: Creates a Radius Server Group.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups

Permissions: Object Manager > Modify Object Manager

PUT radiusservergroups

Request Type: **PUT**

Description: Modifies the Radius Server Group associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}

Permissions: Object Manager > Modify Object Manager

DELETE ranges

Request Type: **DELETE**

Description: Deletes the specified address range.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}

URL to DELETE overrides on a particular object:

/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}?overrideTargetId={target_UUID}

Permissions: Object Manager > Modify Object Manager

PUT ranges

Request Type: **PUT**

Description: Modifies an address range.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ranges

Request Type: **POST**

Description: Creates or overrides an address range with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET ranges

Request Type: **GET**

Description: Retrieves the address range object associated with the specified ID. If no ID is specified, retrieves list of all address range objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET realms

Request Type: **GET**

Description: Retrieves the realm object associated with the specified ID. If no ID is specified, retrieves list of all realm objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms/{object_UUID}`

Permissions: System > Integration > Realms

PUT realms

Request Type: **PUT**

Description: Modifies the realm object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

POST realms

Request Type: **POST**

Description: Creates or overrides the realm objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms`

Permissions: System > Integration > Realms > Modify Realms

DELETE realms

Request Type: **DELETE**

Description: Deletes the specified realm object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

GET realmusergroups

Request Type: **GET**

Description: Retrieves the realm user group object associated with the specified ID. If no ID is specified, retrieves list of all realm user group objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid



Note This is a required parameter.

GET realmusers

Request Type: **GET**

Description: Retrieves the realm user object associated with the specified ID. If no ID is specified, retrieves list of all realm user objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusers`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusers/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid



Note This is a required parameter.

GET route maps

Request Type: **GET**

Description: Retrieves the route map associated with the specified ID. If no ID is specified, retrieves list of all route maps.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager

PUT routemaps

Request Type: **PUT**

Description: Modifies the RouteMap with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager > Modify Objects

POST routemaps

Request Type: **POST**

Description: Creates a RouteMap.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps`

Permissions: Object Manager > Modify Objects

DELETE routemaps

Request Type: **DELETE**

Description: Deletes the RouteMap with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager > Modify Objects

DELETE securitygrouptags

Request Type: **DELETE**

Description: Deletes the custom security group tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/securitygrouptags/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET securitygrouptags

Request Type: **GET**

Description: Retrieves the custom security group tag object associated with the specified ID. If no ID is specified, retrieves list of all custom security group tag objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securitygrouptags

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/securitygrouptags/{object_UUID}

Permissions: Object Manager

Parameters available for filtering: name

POST securitygrouptags

Request Type: **POST**

Description: Creates a custom security group tag object.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/securitygrouptags

Permissions: Object Manager > Modify Object Manager

PUT securitygrouptags

Request Type: **PUT**

Description: Modifies the custom security group tag object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/securitygrouptags/{objectId}

Permissions: Object Manager > Modify Object Manager

DELETE securityzones

Request Type: **DELETE**

Description: Deletes the specified securityzone objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}

Permissions: Object Manager>Modify Object Manager

PUT securityzones

Request Type: **PUT**

Description: Modifies a securityzone object.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}

Permissions: Object Manager>Modify Object Manager

POST securityzones

Request Type: **POST**

Description: Creates or overrides the securityzone objects with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones

URL for Bulk Post: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones?bulk=true

Permissions: Object Manager > Modify Object Manager

GET securityzones

Request Type: **GET**

Description: Retrieves the security zone objects associated with the specified ID. If no ID is specified, retrieves list of all security zone objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}

Permissions: Object Manager

Parameters available for filtering: name

GET SI DNS Feeds

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS feed objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/sidnsfeeds

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/sidnsfeeds/{objectId}

Permissions: Object Manager

GET SI DNS Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS list objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/sidnslists

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/sidnslists/{objectId}

Permissions: Object Manager

GET sinetworkfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence Network Feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence Network Feed objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworkfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworkfeeds/{objectId}`

Permissions: Object Manager

GET SI Network Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence network list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence network list objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworklists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworklists/{objectId}`

Permissions: Object Manager

GET Sinkholes

Request Type: **GET**

Description: Retrieves the Sinkhole objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Sinkhole objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinkholes`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinkholes/{objectId}`

Permissions: Object Manager

GET siurlfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence url feed object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url feed objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurlfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurlfeeds/{object_UUID}`

Permissions: Object Manager

DELETE siurllists

Request Type: **DELETE**

Description: Deletes the Security Intelligence URL List object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/siurllists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET siurllists

Request Type: **GET**

Description: Retrieves the Security Intelligence url list object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url list objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurllists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurllists/{object_UUID}`

Permissions: Object Manager

POST siurllists

Request Type: **POST**

Description: Creates a Security Intelligence URL List object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/siurllists`

Permissions: Object Manager > Modify Object Manager

PUT siurllists

Request Type: **PUT**

Description: Modifies the Security Intelligence URL List object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/siurllists/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE slamonitors

Request Type: **DELETE**

Description: Deletes the sla monitor object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT slamonitors

Request Type: **PUT**

Description: Modifies the sla monitor object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST slamonitors

Request Type: **POST**

Description: Creates or overrides a SLA monitor with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET slamonitors

Request Type: **GET**

Description: Retrieves the SLA Monitors associated with the specified ID. If no ID is specified, retrieves list of all SLA Monitors.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors`

URL by GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}`

Permissions: Object Manager

GET SSO Servers

Request Type: **GET**

Description: Retrieves the SSO Server Policy Object associated with the specified ID. If no ID is specified, retrieves list of all SSO Server Policy Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers`

URL for all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management > Single Sign-On (SSO)

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value

DELETE ssoservers

Request Type: **DELETE**

Description: Deletes SSO Server Policy Object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management > Single Sign-On (SSO)

POST ssoservers

Request Type: **POST**

Description: Creates an SSO Server Policy Object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers`

Permissions: System > User Management> Single Sign-On (SSO)

PUT ssoservers

Request Type: **PUT**

Description: Modifies SSO Server Policy Object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}

Permissions: System > User Management> Single Sign-On (SSO)

GET standard access lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}

Permissions: Object Manager

PUT standardaccesslists

Request Type: **PUT**

Description: Modifies the Standard Access List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}

Permissions: Object Manager > Modify Objects

POST standardaccesslists

Request Type: **POST**

Description: Creates a Standard Access List.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists

Permissions: Object Manager > Modify Objects

DELETE standardaccesslists

Request Type: **DELETE**

Description: Deletes the Standard Access List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}

Permissions: Object Manager > Modify Objects

GET standard community lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager

PUT standardcommunitylists

Request Type: **PUT**

Description: Modifies the Standard Community List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager > Modify Objects

POST standardcommunitylists

Request Type: **POST**

Description: Creates a Standard Community List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

Permissions: Object Manager > Modify Objects

DELETE standardcommunitylists

Request Type: **DELETE**

Description: Deletes the Standard Community List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager > Modify Objects

GET time ranges

Request Type: **GET**

Description: Retrieves the time range object associated with the specified ID. If no ID is specified, retrieves list of all time range objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

PUT time ranges

Request Type: **PUT**

Description: Modifies a time range object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

POST time ranges

Request Type: **POST**

Description: Creates or overrides a time range object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

Permissions: Object Manager > Modify Object Manager

DELETE time ranges

Request Type: **DELETE**

Description: Deletes the time range object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET time zone objects

Request Type: **GET**

Description: Retrieves the time zone object associated with the specified ID. If no ID is specified, retrieves list of all time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{containerUUID}/overrides`

Permissions: Object Manager

PUT time zone objects

Request Type: **PUT**

Description: Modifies a time zone object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager

POST time zone objects

Request Type: **POST**

Description: Creates or overrides a time zone object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

Permissions: Object Manager > Modify Object Manager

DELETE time zone objects

Request Type: **DELETE**

Description: Deletes the time zone object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE tunneltags

Request Type: **DELETE**

Description: Deletes the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT tunneltags

Request Type: **PUT**

Description: Modifies the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST tunneltags

Request Type: **POST**

Description: Creates or overrides a tunnel tag with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/tunneltags`

Permissions: Object Manager > Modify Object Manager

GET tunneltags

Request Type: **GET**

Description: Retrieves the tunnel tag object associated with the specified ID. If no ID is specified, retrieves list of all tunnel tag objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}

Permissions: Object Manager

GET umbrellaprotectionpolicies

Request Type: **GET**

Description: Retrieves the umbrella protection policy associated with the specified ID from the umbrella cloud. If no ID is specified, retrieves list of all umbrella protection policies from the umbrella cloud.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/operational/umbrellaprotectionpolicies

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/operational/umbrellaprotectionpolicies/{object_UUID}

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

POST umbrellaprotectionpolicies

Request Type: **POST**

Description: Creates an umbrella protection policy.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/operational/umbrellaprotectionpolicies

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET urlcategories

Request Type: **GET**

Description: Retrieves the url category object associated with the specified ID. If no ID is specified, retrieves list of all url category objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/urlcategories

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/urlcategories/{object_UUID}

Permissions: Object Manager

DELETE urlgroups

Request Type: **DELETE**

Description: Deletes the specified urlgroup objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}

URL to DELETE overrides on a particular object:

/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}?overrideTargetId={target_UUID}

Permissions: Object Manager > Modify Object Manager

PUT urlgroups

Request Type: **PUT**

Description: Modifies urlgroup objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST urlgroups

Request Type: **POST**

Description: Creates or overrides the urlgroup objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET urlgroups

Request Type: **GET**

Description: Retrieves the url group objects associated with the specified ID. If no ID is specified, retrieves list of all url group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

DELETE urls

Request Type: **GET**

Description: Deletes the specified URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT urls

Request Type: **PUT**

Description: Modifies a URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{parent_object_UUID}`

Permissions: Object Manager

POST urls

Request Type: **POST**

Description: Creates or overrides the URLs with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/urls?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET urls

Request Type: **GET**

Description: Retrieves the url objects associated with the specified ID. If no ID is specified, retrieves list of all url objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

GET Usage

Request Type: **GET**

Description:

Find usage of specified object uuid and type across objects and policies. Supported object types:

Type	Value
Network	NetworkAddress, Host, Network, Range, FQDN, NetworkGroup
Port	Port, ProtocolPortObject, PortObjectGroup, ICMPV4Object, ICMPV6Object, AnyProtocolPortObject
VLAN tag	VlanTag, VlanGroupTag
URL	Url, UrlGroup

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/operational/usage`

Parameters available for filtering: Specify uuid "uuid:object-uuid" and "type:object-type" and type of object.

Permissions: Object Manager

POST validatecertfile

Request Type: **POST**

Description: Uploads and parses a given certificate/key file.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/validatecertfile`

Permissions: Devices > Certificates > Modify Certificates

GET variablesets

Request Type: **GET**

Description: Retrieves the variable set object associated with the specified ID. If no ID is specified, retrieves list of all variable set objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/variablessets`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/variablessets/{object_UUID}`

Permissions: Object Manager

DELETE vlangrouptags

Request Type: **DELETE**

Description: Deletes the specified vlangrouptag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT vlangrouptags

Request Type: **PUT**

Description: Modifies vlangrouptag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST vlangrouptags

Request Type: **POST**

Description: Creates or overrides the VLAN group tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?bulk=true`

Permissions: Object Manager > Modify Object Managers

GET vlangrouptags

Request Type: **GET**

Description: Retrieves the vlan group tag objects associated with the specified ID. If no ID is specified, retrieves list of all vlan group tag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager > Modify Object Manager

DELETE vlangrouptags

Request Type: **DELETE**

Description: Deletes the specified VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT vlantags

Request Type: **PUT**

Description: Modifies VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST vlantags

Request Type: **POST**

Description: Creates or overrides the VLAN tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET vlantags

Request Type: **GET**

Description: Retrieves the vlantag objects associated with the specified ID. If no ID is specified, retrieves list of all vlantag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

Policy Services

DELETE accesspolicies

Request Type: **DELETE**

Description: Deletes the access control policy with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

PUT accesspolicies

Request Type: **PUT**

Description: Modifies an access control policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

POST accesspolicies

Request Type: **POST**

Description: Creates an access control policy with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

GET accesspolicies

Request Type: **GET**

Description: Retrieves the access control policy associated with the specified ID. If no ID is specified, retrieves a list of all access control policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies

DELETE accessrules

Request Type: **DELETE**

Description: Deletes an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

PUT accessrules

Request Type: **PUT**

Description: Modifies an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

POST accessrules

Request Type: **POST**

Description: Creates an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

GET accessrules

Request Type: **GET**

Description: Retrieves the access control rule associated with the specified policy ID and rule ID. If no rule ID is specified, retrieves list of all access rules associated with the specified policy ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy

DELETE categories

Request Type: **DELETE**

Description: Deletes a category associated with the specified policy ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

PUT categories

Request Type: **PUT**

Description: Modifies the category associated with the specified policy ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

POST categories

Request Type: **POST**

Description: Creates a category for access control policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET categories

Request Type: **GET**

Description: Retrieves the category associated with the specified policy ID. If no ID is specified, retrieves list of all categories associated with the specified policy ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy

PUT defaultactions

Request Type: **PUT**

Description: Modifies the default action associated with the specified access control policy ID and default action ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/defaultactions/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

GET defaultactions

Request Type: **GET**

Description: Retrieves the default action associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/defaultactions`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/defaultactions/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy

GET loggingsettings

Request Type: **GET**

Description: Retrieves the logging setting associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{object_UUID}`

Permissions: Policies

PUT loggingsettings

Request Type: **PUT**

Description: Modifies the logging setting associated with the specified access control policy ID and default action ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{objectId}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

GET securityintelligencepolicies

Request Type: **GET**

Description: Retrieves the security intelligence policy associated with the specified Access Policy. If no ID is specified for a GET, retrieves all security intelligence policies.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies/{objectId}`

Permissions: Intelligence

GET dnspolicies

Request Type: **GET**

Description: Retrieves the DNS Policy. If no ID is specified, retrieves a list of all DNS policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{objectId}`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name.

GET allowdnrules

Request Type: **GET**

Description: Retrieves all the allow rules for a given DNS Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/allowdnrules`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

GET blockdnrules

Request Type: **GET**

Description: Retrieves all the block rules for a given DNS Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/blockdnrules`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

GET dynamicaccesspolicies

Request Type: **GET**

Description: Retrieves the Dynamic Access Policy. If no ID is specified for a GET, retrieves list of all Dynamic Access Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}`

Permissions: Devices > VPN

PUT dynamicaccesspolicies

Request Type: **PUT**

Description: Modifies the Dynamic Access Policy associated with the specified rule ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST dynamicaccesspolicies

Request Type: **POST**

Description: Creates a Dynamic Access policy associated.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies`

Permissions: Devices > VPN > Modify VPN

DELETE dynamicaccesspolicies

Request Type: **DELETE**

Description: Deletes the Dynamic Access Policy associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN > Modify VPN

GET filepolicies

Request Type: **GET**

Description: Retrieves the file policy object associated with the specified ID. If no ID is specified, retrieves list of all file policy objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/filepolicies

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/filepolicies/{object_UUID}

Permissions: Policies>Access Control>Malware & File Policy

DELETE ftdnatpolicies

Request Type: **DELETE**

Description: Deletes the threat defense NAT policy with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{object_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

PUT ftdnatpolicies

Request Type: **PUT**

Description: Modifies an threat defense NAT policy with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{object_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

POST ftdnatpolicies

Request Type: **POST**

Description: Creates a threat defense device NAT policy with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies

URL for Bulk Post: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies?bulk=true

Permissions: Devices>NAT>NAT List >Modify NAT policy

GET ftdnatpolicies

Request Type: **GET**

Description: Retrieves the threat defense NAT policy associated with the specified ID. If no ID is specified, retrieves a list of all threat defense NAT policies.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{object_UUID}

Permissions: Devices>NAT>NAT List

DELETE ftds2svpns

Request Type: **DELETE**

Description: Deletes the threat defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}

Permissions: Devices > VPN > Modify VPN

PUT ftds2svpns

Request Type: **PUT**

Description: Modifies a threat defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}

Permissions: Devices > VPN > Modify VPN

POST ftds2svpns

Request Type: **POST**

Description: Creates a threat defense Site to Site VPN topology with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns

Permissions: Devices > VPN > Modify VPN

GET ftds2svpns

Request Type: **GET**

Description: Retrieves the threat defense Site to Site VPN topology associated with the specified ID. If no ID is specified, retrieves a list of all threat defense Site to Site VPN topologies.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}

Permissions: Devices > VPN

PUT advancedsettings

Request Type: **PUT**

Description: Modifies advanced settings inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/advancedsettings/{advancedsetting_UUID}`

Permissions: Devices > VPN > Modify VPN

GET advancedsettings

Request Type: **GET**

Description: Retrieves an advanced settings inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list containing a single AdvancedSettings entry of the topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/advancedsettings`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/advancedsettings/{advancedSetting_UUID}`

Permissions: Devices > VPN

DELETE endpoints

Request Type: **DELETE**

Description: Deletes all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN > Modify VPN

PUT endpoints

Request Type: **PUT**

Description: Modifies all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN > Modify VPN

POST endpoints

Request Type: **POST**

Description: Creates all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/endpoints`

Permissions: Devices > VPN > Modify VPN

GET endpoints

Request Type: **GET**

Description: Retrieves all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list of all Endpoints of a topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/endpoints`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN

PUT ikesettings

Request Type: **PUT**

Description: Modifies the IKE Settings associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings/{ikesetting_UUID}`

Permissions: Devices > VPN > Modify VPN

GET ikesettings

Request Type: **GET**

Description: Retrieves the IKE Settings associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves IKE Settings of a topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings/{ikesetting_UUID}`

Permissions: Devices > VPN

PUT ipsecsettings

Request Type: **PUT**

Description: Modifies an IPsec Proposal settings inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ipsecsettings/{ipsecsetting_UUID}`

Permissions: Devices > VPN > Modify VPN

GET ipsecsettings

Request Type: **GET**

Description: Retrieves an IPsec Proposal Settings inside a VPN Site To Site Topology. If no ID is specified for a GET, retrieves list containing a single IPsec Settings entry of the topology.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/ipsecsettings

URL for GET by ID: /api/fmc_config/v1/domain/DomainUUID/policy/ftds2svpns/{topology_UUID}/ipsecsettings/{ipsecsetting_UUID}

Permissions: Devices > VPN

GET ipsecadvancedsettings

Request Type: **GET**

Description: Retrieves IPsec Advance Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single IPSEC Advance Setting entry of the topology.

URL:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecadvancedsettings/{objectId}

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecadvancedsettings/{objectId}/{object_UUID}

Permissions: Object Manager

PUT ipsecadvancedsettings

Request Type: **PUT**

Description: Modifies IPsec Advance Setting inside a VPN RA Topology.

URL:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecadvancedsettings/{objectId}

Permissions: Object Manager > Modify Object Manager

GET ipsecryptomaps

Request Type: **GET**

Description: Retrieves IPsec Crypto Map Setting inside a VPN RA Topology. If no ID is specified, retrieves list containing a single IPSEC Crypto Map Setting entry of the topology.

URL:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecryptomaps/{objectId}

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecryptomaps/{objectId}/{object_UUID}

Permissions: Object Manager

PUT ipsecryptomaps

Request Type: **PUT**

Description: Modifies IPsec Crypto Map Setting inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecryptomaps/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE autonatrules

Request Type: **DELETE**

Description: Deletes a NAT rule with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List >Modify NAT policy

PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{autonatrule_UUID}`

Permissions: Devices>NAT>NAT List >Modify NAT policy

POST autonatrules

Request Type: **POST**

Description: Creates a NAT policy with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules`

Permissions: Devices>NAT>NAT List >Modify NAT policy

GET autonatrules

Request Type: **GET**

Description: Retrieves the NAT rule associated with the specific ID. If no ID is specified, retrieves a list of all NAT rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies{container_UUID}/autonatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List

PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{autonatrule_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

DELETE manualnatrules

Request Type: **POST**

Description: Deletes a manual NAT rule in the specified NAT policy.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

PUT manualnatrules

Request Type: **PUT**

Description: Modify a manual NAT rule in the specified NAT policy.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

POST manualnatrules

Request Type: **POST**

Description: Creates manual NAT rules with the specified parameters.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules

Permissions: Devices>NAT>NAT List >Modify NAT policy

GET manualnatrules

Request Type: **GET**

Description: Retrieves the manual NAT rule associated with the specified ID. If no ID is specified, retrieves a list of all manual NAT rules.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}

Permissions: Devices>NAT>NAT List

GET natrules

Request Type: **GET**

Description: Retrieves the list of all NAT rules (manual and auto) associated with the specified NAT policy.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/natrules

Permissions: Devices>NAT>NAT List

DELETE natrules

Request Type: **DELETE**

Description: Deletes the NAT rule (manual or auto) associated with the specified policy ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/ftdnatpolicies/{containerUUID}/natrules

Permissions: Devices > NAT > NAT List > Modify NAT policy

PUT inheritancesettings

Request Type: **PUT**

Description: Modifies the inheritance settings associated with specified Access Policy.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}

Permissions: Policies > Access Control Policy > Modify Access Control Policy

GET inheritancesettings

Request Type: **GET**

Description: Retrieves the inheritance settings associated with specified Access Policy. If no ID is specified, retrieves a list of all inheritance settings.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}

Permissions: Policies > Access Control Policy

GET identitypolicies

Request Type: **GET**

Description: Retrieves the Identity Policy associated with the specified ID. If no ID is specified, retrieves all Identity Policies.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/identitypolicies

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/policy/identitypolicies/{objectId}

Permissions: Policies > Access Control > Identity Policy

GET intrusionpolicies

Request Type: **GET**

Description: Retrieves the intrusion policy associated with the specified ID. If no ID is specified, retrieves list of all intrusion policies.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies/{object_UUID}

Permissions: Policies > Access Control > Intrusion Policy

PUT intrusionpolicies

Request Type: **PUT**

Description: Modifies the intrusion policy associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST intrusionpolicies

Request Type: **POST**

Description: Creates an intrusion policy with the specified parameters.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

DELETE intrusionpolicies

Request Type: **DELETE**

Description: Deletes the intrusion policy associated with the specified ID.

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies/{object_UUID}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rulegroups associated with the policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET intrusionrules

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rules associated with the policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

PUT intrusionrules

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET networkanalysispolicies

Request Type: **GET**

Description: Retrieves the network analysis policy with the specified ID. If no ID is specified, retrieves list of all network analysis policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy

PUT networkanalysispolicies

Request Type: **PUT**

Description: Modifies the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

POST networkanalysispolicies

Request Type: **POST**

Description: Creates a network analysis policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

DELETE networkanalysispolicies

Request Type: **DELETE**

Description: Deletes the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET Inspector Configurations

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy

GET inspectoroverrideconfigs

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectoroverrideconfigs`

Permissions: Policies > Access Control > Access Control Policy

PUT inspectoroverrideconfigs

Request Type: **GET**

Description: Modifies the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

DELETE prefilterpolicies

Request Type: **DELETE**

Description: Deletes a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

PUT prefilterpolicies

Request Type: **PUT**

Description: Modifies a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

POST prefilterpolicies

Request Type: **POST**

Description: Creates a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

GET prefilterpolicies

Request Type: **GET**

Description: Retrieves the prefilter policy associated with the specified ID. If no ID is specified, retrieves a list of all prefilter policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

GET remoteaccessvpns

Request Type: **GET**

Description: Retrieves the threat defense RA VPN topology associated with the specified ID. If no ID is specified for a GET, retrieves list of all threat defense RA VPN topologies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}`

Permissions: Devices > VPN

DELETE ravpns

Request Type: **DELETE**

Description: Deletes Firewall Threat Defense RA VPN topology associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST ravpns

Request Type: **POST**

Description: Creates a Firewall Threat Defense RA VPN topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns`

Permissions: Devices > VPN > Modify VPN

PUT ravpns

Request Type: **PUT**

Description: Modifies Firewall Threat Defense RA VPN topology associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}

Permissions: Devices > VPN > Modify VPN

GET s2svpnsummaries

Request Type: **GET**

Description: Retrieves all the configured S2S VPN in the system , with short summary along with the health of the tunnels

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/s2svpnsummaries

Permissions: Devices > VPN

GET addressassignmentsettings

Request Type: **GET**

Description: Retrieves Address Assignment Setting inside a VPN RA Topology.

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}

Permissions: Devices > VPN

PUT addressassignmentsettings

Request Type: **PUT**

Description: Modifies Address Assignment Setting inside a VPN RA Topology.

URL:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}

Permissions: Devices > VPN > Modify VPN

GET connectionprofiles

Request Type: **GET**

Description: Retrieves Connection Profile data inside a VPN RA Topology. If no ID is specified, retrieves a list of all connection profiles for the VPN RA topology.

URL for GET:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}

Permissions: Devices > VPN

DELETE connectionprofiles

Request Type: **DELETE**

Description: Deletes the Connection Profile data with the associated ID inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST connectionprofiles

Request Type: **POST**

Description: Creates a Connection Profile inside a VPN RA Topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles`

Permissions: Devices > VPN > Modify VPN

PUT connectionprofiles

Request Type: **PUT**

Description: Modifies the Connection Profile data with the associated ID inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN > Modify VPN

DELETE hitcounts

Request Type: **DELETE**

Description: Deletes the hit count information and resets the hit count to zero for an assigned policy or rule in a device, from the management center.

Note that the DELETE operation returns a 200 (OK) message upon successful completion of the operation.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

PUT hitcounts

Request Type: **PUT**

Description: Retrieves the latest hit count information for a device against an assigned policy, and stores it in the management center.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

GET hitcounts

Request Type: **GET**

Description: Retrieves the last collected hit count information for a device against an assigned policy or its rules, from the management center.

Note that during the GET operation, hit counts will be automatically pre-fetched from the device if it is the first retrieval being done against a specific device.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

DELETE prefilterrules

Request Type: **DELETE**

Description: Deletes the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

PUT prefilterrules

Request Type: **PUT**

Description: Modifies the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

POST prefilterrules

Request Type: **POST**

Description: Creates a prefilter rule.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

GET prefilterrules

Request Type: **GET**

Description: Retrieves the prefilter rule associated with the specified rule ID. If no ID is specified, retrieves list of all prefilter rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

GET snmpalerts

Request Type: **GET**

Description: Retrieves the SNMP alert object associated with the specified ID. If no ID is specified, retrieves a list of all SNMP alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts > View Alerts

GET syslogalerts

Request Type: **GET**

Description: Retrieves the syslog alert object associated with the specified ID. If no ID is specified, retrieves a list of all syslog alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts

GET healthpolicies

Request Type: **GET**

Description: Retrieves the Health Policy with the associated ID. If no ID is specified, retrieves a list of all Health Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/healthpolicies/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/healthpolicies/{objectId}/{object_UUID}`

Permissions: System > Health > Health Policy

GET ldapattributemaps

Request Type: **GET**

Description: Retrieves LDAP Attribute Maps inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single LDAP Attribute Maps of the topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps/{objectId}/{object_UUID}`

Permissions: Devices > VPN

PUT ldapattributemaps

Request Type: **PUT**

Description: Modifies the LDAP Attribute Map with the specified ID inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET policylocks

Request Type: **GET**

Description: Retrieves the policy lock statuses for access policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/operational/policylocks`

Permissions: Policies > Access Control > Access Control Policy

POST policylocks

Request Type: **POST**

Description: Locks or unlocks the specified Access Control policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/operational/policylocks`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET umbrelladnspolicies

Request Type: **GET**

Description: Retrieves the umbrella DNS policy associated with the specified ID. If no ID is specified, retrieves list of all umbrella DNS policies.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{objectId}

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{objectId}/{object_UUID}

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

DELETE umbrelladnspolicies

Request Type: **DELETE**

Description: Deletes the umbrella DNS policy associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{objectId}

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

POST umbrelladnspolicies

Request Type: **POST**

Description: Creates an umbrella DNS policy.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

PUT umbrelladnspolicies

Request Type: **PUT**

Description: Modifies the umbrella DNS policy associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{objectId}

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET umbrelladnsrules

Request Type: **GET**

Description: Retrieves the the umbrella DNS Rule associated with the specified ID. If no ID is specified, retrieves list of all umbrella DNS rules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules/{objectId}/{object_UUID}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

PUT umbrelladnsrules

Request Type: **PUT**

Description: Modifies the umbrella DNS Rule associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules/{objectId}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET flexconfigpolicies

Request Type: **GET**

Description: Retrieves the Flexconfig Policy with the associated ID. If no ID is specified, retrieves list of all Flexconfig Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/flexconfigpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/flexconfigpolicies/{object_UUID}`

Permissions: Devices > Flexconfig Policy

POST flexconfigpolicies

Request Type: **POST**

Description: Creates a Flexconfig Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/flexconfigpolicies`

Permissions: Devices > Flexconfig Policy > Modify Flexconfig Policy

GET ftdplatformsettingspolicies

Request Type: **GET**

Description: Retrieves the FTDPlatformSettings Policy with the associated ID. If no ID is specified, retrieves a list of all FTDPlatformSettings Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ftdplatformsettingspolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ftdplatformsettingspolicies/{object_UUID}`

Permissions: Devices > Device Management

GET loadbalancesettings

Request Type: **GET**

Description: Retrieves Load Balance Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Load Balance Setting entry of the topology.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/loadbalancesettings

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/loadbalancesettings/{object_UUID}

Permissions: Devices > VPN

PUT loadbalancesettings

Request Type: **PUT**

Description: Modifies Load Balance Setting inside a VPN RA Topology.t.

URL:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/loadbalancesettings/{objectId}

Permissions: Devices > VPN > Modify VPN

POST migrate

Request Type: **POST**

Description: Initiates the flexConfig migration for specified devices.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/flexconfigpolicies/{containerUUID}/migrate

Permissions: Devices > Flexconfig Policy > Modify Flexconfig Policy

Policy Assignment Services

PUT policyassignments

Request Type: **PUT**

Description: Modifies an assigned access policy to add a new device or a new device group.

URL: /api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments/{object_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

POST policyassignments

Request Type: **POST**

Description: Assigns an unassigned access policy to devices or device groups.

URL: /api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET policyassignments

Request Type: **GET**

Description: Retrieves the policy assignment associated with the specified ID. If no ID is specified, retrieves a list of all policy assignments to target devices.

URL: /api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments/{object_UUID}

Permissions: Policies > Access Control > Access Control Policy

Parameters available for filtering: name

Status Services

GET taskstatuses

Description: Retrieves information about a previously submitted pending job/task with the specified ID. This is currently supported for device registration and deployment jobs.

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/job/taskstatuses/{object_UUID}

Permissions: Modify Devices/Deployment

System Information

GET domain

Request Type: **GET**

Description: Requests version information for the domain. If no ID is specified, retrieves a list of all domains.

URL: /api/fmc_platform/v1/info/domain/{domain_UUID}/

URL for GET by ID: /api/fmc_platform/v1/info/domain/{domain_UUID}/{object_UUID}

Permissions: System > Domains

GET serverversion

Request Type: **GET**

Description: Requests version information for the server. If no ID is specified, retrieves a list of all servers.

URL: /api/fmc_platform/v1/info/serverversion

URL for GET by ID: /api/fmc_platform/v1/info/serverversion/{objectID}

Permissions:

Update Packages

POST Cancel Upgrades

Request Type: **POST**

Description: This POST operation cancels software upgrade packages to applicable devices running threat defense.

URL: `/api/fmc_platform/v1/updates/cancelupgrades`

Permissions: System > Tools > Scheduling

POST Retry Upgrades

Request Type: **POST**

Description: This POST operation retries software upgrade packages to applicable devices running threat defense.

URL: `/api/fmc_platform/v1/updates/retryupgrades`

Permissions: System > Updates

DELETE upgradepackages

Request Type: **DELETE**

Description: Deletes a specific threat defense upgrade package from the managing management center.

URL: `/api/fmc_platform/v1/updates/upgradepackages/{package_UUID}`

Permissions: System > Tools > Scheduling

GET upgradepackages

Request Type: **GET**

Description: Retrieves a list of locally available threat defense upgrade packages, including major upgrades, maintenances release upgrades, and hotfixes.

URL: `/api/fmc_platform/v1/updates/upgradepackages`

URL for GET by ID: `/api/fmc_platform/v1/updates/upgradepackages/{package_UUID}`

Permissions: System > Tools

GET listapplicabledevices

Request Type: **GET**

Description: Lists registered device containers that support the specific upgrade package.

URL: `/api/fmc_platform/v1/updates/upgradepackages/{container_UUID}/applicabledevices`

Permissions: System > Tools > Scheduling

POST upgradepackage

Request Type: **POST**

Description: Dependent on the parameters, this POST operation either pushes available software upgrade packages to applicable devices running threat defense or initiates the upgrade process for applicable devices running threat defense. This process is applicable for standalone, clustered, or high availability pairs with the following limitations:

- For all configurations, ensure that the current POST operation is completed successfully before proceeding to the next POST operation.
- Perform the POST operation on the primary node of a high availability pair. Do not perform the POST operation for more than one high availability pair at a time.
- Perform the POST operation on the



Note Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses, on page 180](#).

URL: `/api/fmc_platform/v1/updates/upgrades/`

Permissions: System > Tools > Scheduling

POST revertupgrades

Request Type: **POST**

Description: Triggers reversion of an upgrade.

URL: `/api/fmc_platform/v1/updates/revertupgrades`

Permissions: System > Tools > Scheduling

GET upgradepackages: Monitor

Request Type: **GET**

Description: Monitors the upgrade process once you have executed the POST upgrade task.

URL: `/api/fmc_platform/v1/domain/{domain_UUID}/job/taskstatuses/{task_ID}`

Permissions: System > Tools > Scheduling

POST upgradesnapshot

Request Type: **POST**

Description: Creates an upgrade snapshot.

URL: `/api/fmc_platform/v1/updates/upgradesnapshot`

Permissions: System > Tools

